




SPROCKETS for series

800 - 802 - 805 - 805 VG

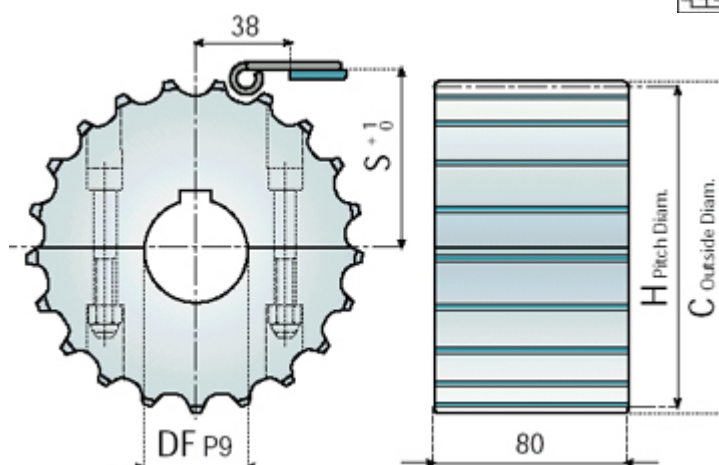

SPLIT SPROCKETS

Material: polyamide, screws in stainless steel, DIN 6885 key seat.

Notes: special shape of teeth compensates natural chain lengthening after prolonged use.

Features:

- Excellent wear and chemical resistance.
- Reduced noise level and quiet operation.
- Reinforced design.
- Completely closed structure, easier to clean and to disinfect.
- Increased keyway strength.
- The design of the sprocket ensures smooth running and long service life.


CODE	Z	C mm	H mm	S mm	DF mm
12900	19	117.0	117.34	61.9	18*
12280					25
12281					30
12282					35
12283					40
12901	21	129.0	129.26	67.8	18*
12284					25
12285					30
12286					35
12287					40
12902	23	142.0	141.21	73.8	18*
12288					25
12289					30
12290					35
12291					40
12903	25	154.0	153.21	79.8	18*
12292					25
12293					30
12294					35
12295					40
121307					18*

121308	27	166.8	165.20	85.8	25
121309					30
121310					35
121311					40
121312	29	178.5	177.24	91.8	18*
121313					25
121314					30
121315					35
121316					40

•Sprockets in material Steel and Cast Iron on request. *Plain bore

SPROCKETS for series

800 - 802 - 805 - 805 VG

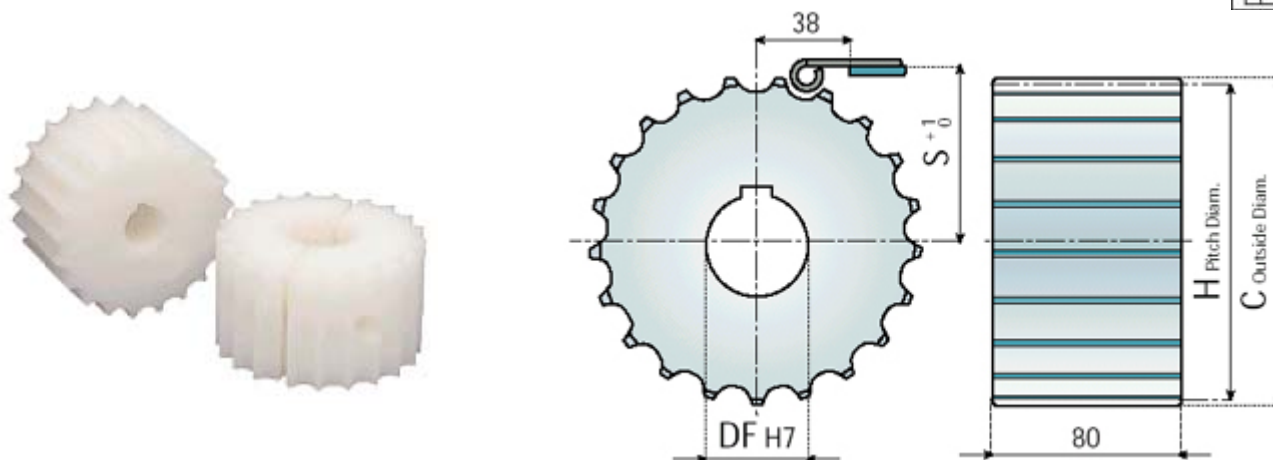

SPLIT SPROCKETS

Material: polyamide, DIN 6885 key seat.

Notes: special shape of teeth compensates natural chain lengthening after prolonged use.

Features:

- Excellent wear and chemical resistance.
- Reduced noise level and quiet operation.
- Reinforced design.
- Completely closed structure, easier to clean and to disinfect.
- Increased keyway strength.
- The design of the sprocket ensures smooth running and long service life.


CODE	Z	C mm	H mm	S mm	DF mm
12296	19	117.0	117.34	61.9	25
12297					30
12298					35
12299					40
12437	21	129.0	129.26	67.8	25
12438					30
12439					35
12440					40
12441	23	142.0	141.21	73.8	25
12442					30
12443					35

12444					40
12445					25
12446	25	154.0	153.21	79.8	30
12447					35
12448					40
121317	27	166.8	165.20	85.8	25
121318					30
121319					35
121320					40
121321	29	178.5	177.24	91.8	25
121322					30
121323					35
121324					40

•Sprockets in material Steel and Cast Iron on request.

SPROCKETS for series

800 - 802 - 805 - 805 VG

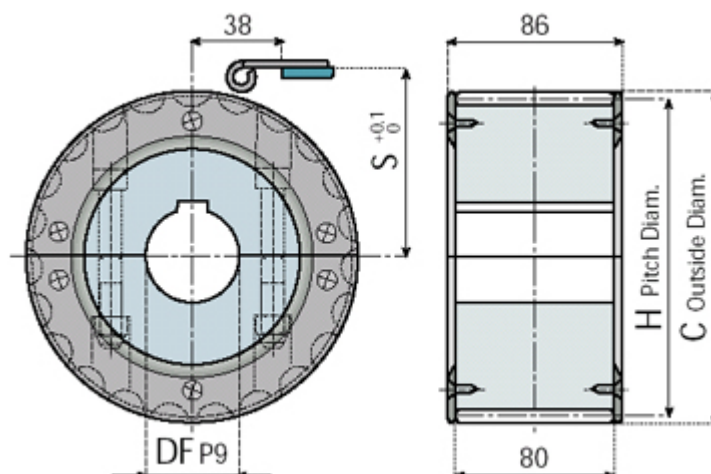

SPLIT SPROCKETS

Material: polyamide, screws in stainless steel, DIN 6885 key seat.

Notes: special shape of teeth compensates natural chain lengthening after prolonged use.


Features:

- Excellent wear and chemical resistance.
- Reduced noise level and quiet operation.
- Reinforced design.
- Completely closed structure, easier to clean and to disinfect.
- The design of the sprocket ensures smooth running and long service life.
- Increased keyway strength.

CODE	Z	C mm	H mm	S mm	DF mm
12901A	21	129.0	129.26	67.8	18*
12284A					25
12285A					30
12286A					35
12287A					40
12902A					18*
12288A					25

12289A	23	142.0	141.21	73.8	30
12290A					35
12291A					40
12903A	25	154.0	153.21	79.8	18*
12292A					25
12293A					30
12294A					35
12295A					40

*Plain bore

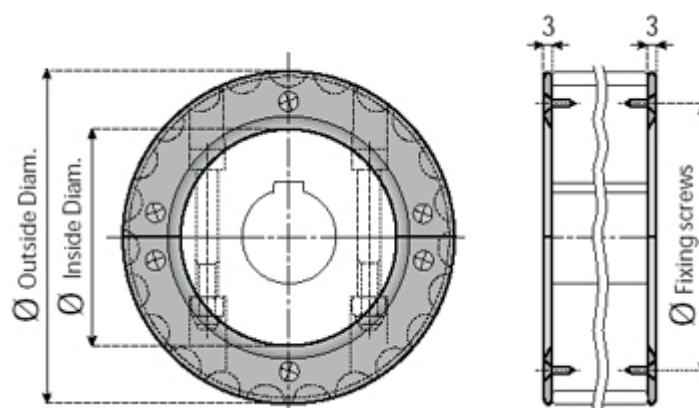

GUIDE RINGS

Material: reinforced polyamide; screws in stainless steel.


Supply: 4 sectors and 12 screws.

CODE	Z	Ø Outside	Ø Inside	Ø Fixing screws
12790B	21	129.25	79	104
12790N				
12791B	23	142	92	116
12791N				
12792B	25	154	104	128
12792N				

SPROCKETS for series

800 - 802 - 805 - 805 VG



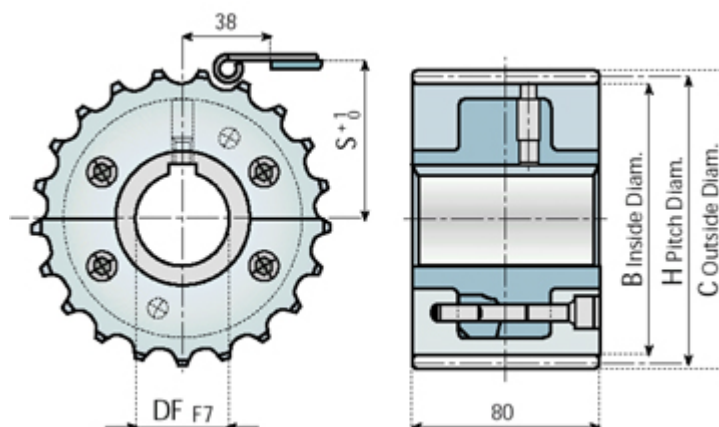

DRIVE SPROCKET IN 5 SECTIONS

Material: hub in stainless steel AISI 304, screws and pins in stainless steel, toothed sections in polyamide.

Notes: DIN 6885 key seat, axial locking on the shaft with screws M8.

Toothed sections can be replaced without removing the hub from the shaft.


Features:

- Excellent wear and chemical resistance.
- Reduced noise level and quiet operation.
- Reinforced design.
- Completely closed structure, easier to clean and to disinfect
- Recyclable.
- Quickly replaceable.

CODE Standard	CODE Toothed Sections	Z mm	B mm	C mm	H mm	S mm	DF mm
12150	12156	21	116.1	129.0	129.26	67.8	30
12151							40
12152	12157	23	128.1	142.0	141.21	73.8	30
12153							40
12154	12158	25	140.1	154.0	153.2	79.8	30
12155							40

SPROCKETS for series

800 - 802 - 805 - 805 VG

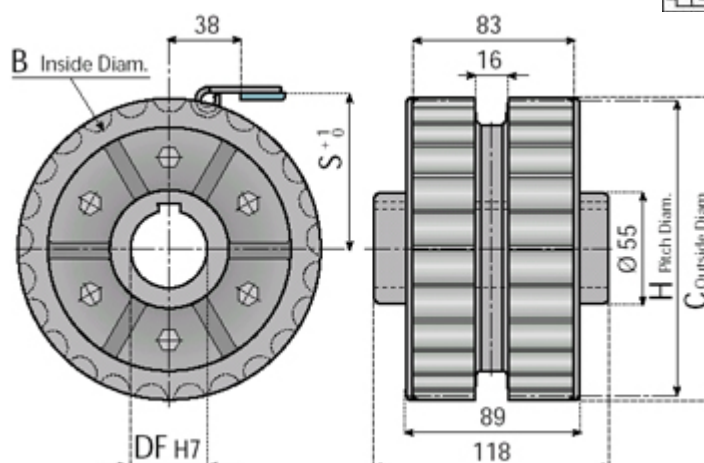

**DRIVE SPROCKETS**

Material: reinforced polyamide, screws in stainless steel, DIN 6885 key seat.

CODE	Z	B mm	C mm	H mm	S mm	DF mm
12033	25	140.1	154	153.2	79.8	25
12034						30
12035						35
12036						40