
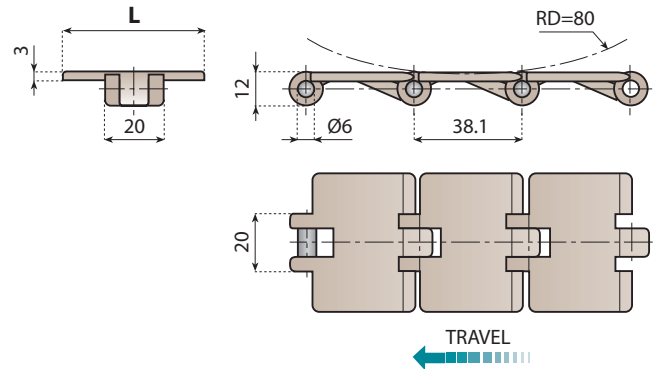


**Applications:**

- Exclusive mini hinge plastic chain for use in applications where space is restricted
- Ideal for conveying containers in the cosmetic or pharmaceutical industries

On request and for adequate quantities these chains can be produced in:

D
Grey Acetal Resin

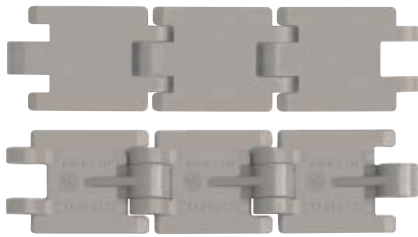

Pages 4⇒7





Pages 271⇒273



Pages 333⇒337

Pin material: Austenitic Steel

Chain - Ref.	Code	Material plate	Breaking load N	Width L		Weight Kg/m
				mm	inch	
SK 38 K32 LF	11410	LF Brown	2.000	32.0	1 ¼	0.25
SK 38 K50 LF	11411			50.8	2	0.35
SK 38 K32 XPG	11412G	XPG Dark Brown	1.900	32.0	1 ¼	0.25
SK 38 K50 XPG	11413G			50.8	2	0.35
SK 38 K32 NG	11414	NG Green	1.700	32.0	1 ¼	0.25
SK 38 K50 NG	11415			50.8	2	0.35

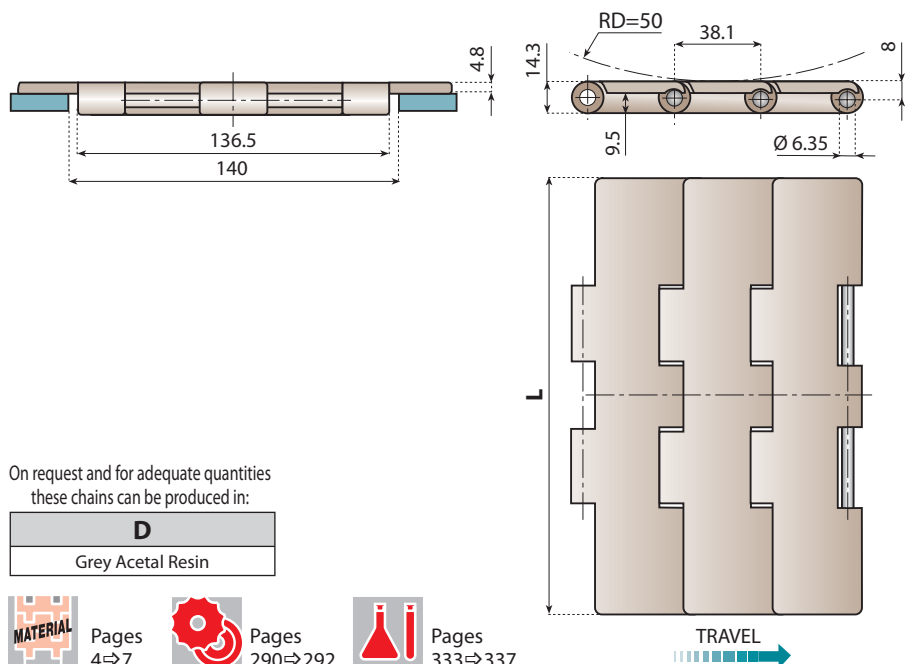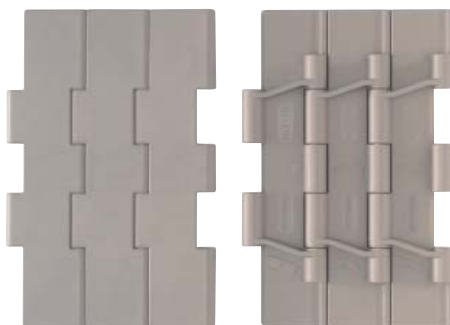

On request and for adequate quantities these chains can be produced in:

D
Grey Acetal Resin



Pages 4⇒7



Pages 290⇒292



Pages 333⇒337

These chains have a double hinge and double reinforcing bars, for a high strength.

Pin material: Austenitic Steel

Chain - Ref.	Code	Material plate	Breaking load N	Width L		Weight Kg/m
				mm	inch	
LF 821 K750	11002	LF Brown	8.300	190.5	7 ½	2.59
LF 821 K1000	11004			254.0	10	3.08
LF 821 K1200	11006			304.8	12	3.35
XPG 821 K750	11510G	XPG Dark Brown	8.100	190.5	7 ½	2.59
XPG 821 K1000	11511G			254.0	10	3.08
XPG 821 K1200	11512G			304.8	12	3.35
NG 821 K750	11170	NG Green	7.800	190.5	7 ½	2.59
NG 821 K1000	11171			254.0	10	3.08
NG 821 K1200	11172			304.8	12	3.35

Standard length: 80 pitches (10 ft. - 3.048 m)

Breaking Load according to Standard ISO 4348 - DIN 8153