


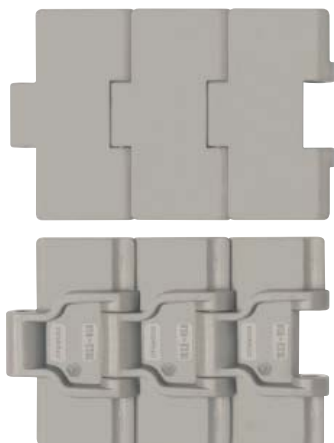


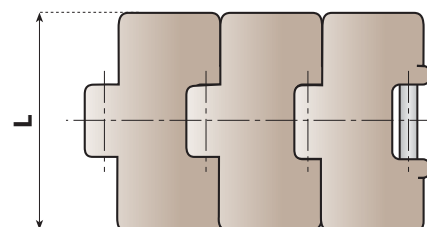

- HIGH LOAD CAPACITY
- ZERO GAP

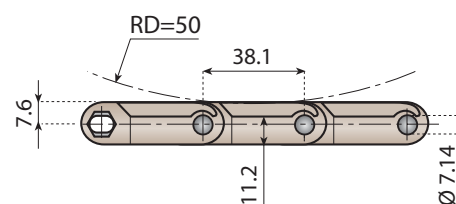

TRAVEL



Features:

Standardization

- Identical sprockets as sideflexing chains
- Standard conveyor construction

High load capacity

- Particularly suitable for accumulation tables as well as for pressure-less combiners

Improved product stability

- Reduced gap between adjacent tracks
- Better topplate flatness in the hinge area

Pin material: Austenitic Steel

On request and for adequate quantities these chains can be produced in:

AR	D	AS	CR	HT
Abrasion Resistance	Grey Acetal Resin	Anti-static Acetal Resin	Chemical Resistance	High Temperature Resistance



Pages
4→7



Pages
293→294




Pages
333→337




Chain - Ref.	Code	Material plate	Breaking load N	Width L		Weight Kg/m
				mm	inch	
LF 828 K325	11130	LF Brown	6.000	82.5	3 1/4	1.10
LF 828 K330	11131			83.8	3 19/64	1.15
XPG 828 K325	11132G	XPG Dark Brown	5.600	82.5	3 1/4	1.10
XPG 828 K330	11133G			83.8	3 19/64	1.15
NG 828 K325	11134	NG Green	5.000	82.5	3 1/4	1.10
NG 828 K330	11135			83.8	3 19/64	1.15

STRAIGHT RUNNING CHAINS

831

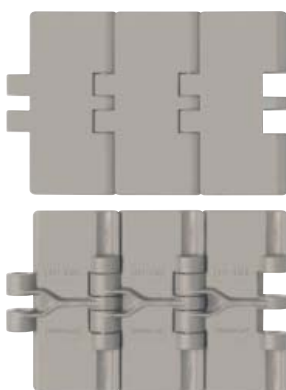

**TOP PLATE
THICKNESS 4.8 mm**

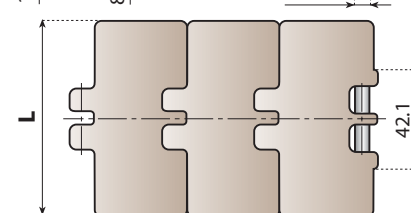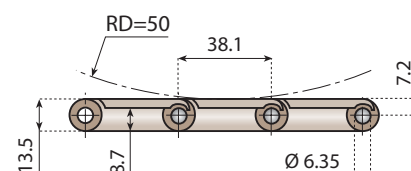

TRAVEL



Note:

The 831 series has a thicker top plate (4.8 mm) giving much more wear life. It also simplifies conveyor design when matching chains from the series 821 - 879 - 882 - 8257 - 882 M

On request and for adequate quantities these chains can be produced in:

AR	D	AS	CR	HT
Abrasion Resistance	Grey Acetal Resin	Anti-static Acetal Resin	Chemical Resistance	High Temperature Resistance



Pages
4→7



Pages
286→289



Pages
333→337

Chain - Ref.	Code	Material plate	Breaking load N	Width L		Weight Kg/m
				mm	inch	
LF 831 K325	11607	LF Brown	5.000	82.5	3 1/4	1.04
LF 831 K450	11608			114.3	4 1/2	1.29
LF 831 K750	11609			190.5	7 1/2	1.82
XPG 831 K325	11105G	XPG Dark Brown	4.800	82.5	3 1/4	1.04
XPG 831 K450	11106G			114.3	4 1/2	1.29
XPG 831 K750	11107G			190.5	7 1/2	1.82
NG 831 K325	11160	NG Green	4.000	82.5	3 1/4	1.04
NG 831 K450	11161			114.3	4 1/2	1.29
NG 831 K750	11162			190.5	7 1/2	1.82

Standard length: 80 pitches (10 ft. - 3.048 m)

Breaking Load according to Standard ISO 4348 - DIN 8153