



Other Series: 881 VG - 881 TAB VG

8857 M VG SIDEFLEXING CHAINS FOR MAGNETIC SYSTEM

NEWS SERIES!

This chain is part of the new series of stainless steel and plastic chains having a hinge - width of 57 mm.

Versions:


series

STAINLESS STEEL CHAINS:

Straight running chain	8157
Sideflexing chain for magnetic system	8857 M
Straight running chain with rubber pad	8157 VG
Sideflexing chain with rubber pad for magnetic system	8857 M VG

PLASTIC CHAINS:

Straight running chain	8257
Sideflexing chain for magnetic system	882 M
Straight running chain with accumulation rollers	LBP 8257
Sideflexing chain with accumulation roller for magnetic system	LBP 882 M
Straight running chain with rubber pad	8257 VG
Sideflexing chain with rubber pad for magnetic system	882 M VG

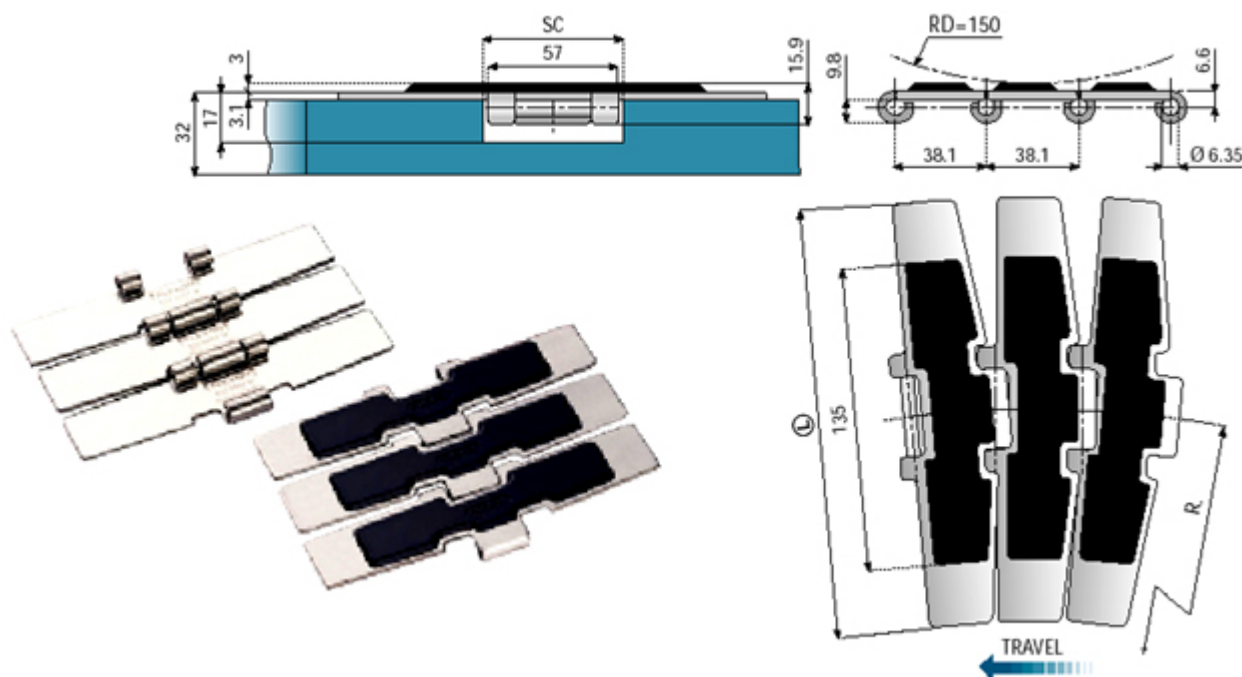

CHAIN - REF.	CODE	Material		Yield Point N	Width L		R min.	SC		Weight Kg/m
		Plate	Rubber		mm	inch.		Straight	Curving	
SSE 8857 M K750 VG	10511	EXTRA PLUS	NBR	10400	190.5	7.1/2	750	61	60	5.7

Breaking Load according to Standard ISO 4348 - DIN 8153

EXTRA PLUS - Extra Plus Stainless Steel ([For further information](http://www.systemplast.com/documenti/046.htm))

NBR - N.B.R. Rubber

Standard length: 80 pitches (10 ft. - 3.048 m).

Characteristics: sideflexing chains with vulcanized N.B.R. rubber

Advantages:

- High resistance to wear and tearing • Working temperature from -30°C to $+120^{\circ}\text{C}$
- High resistance to oil, grease and acids. • Conveyance up to max 20°

Characteristics: the chains series 881 M and 8857 M are securely retained in the curve by magnets located under the hinge of chain in the upper part of curve. As there are no tab or bevel shoes on these chains they can be easily removed from the curve for the purpose of maintenance or cleaning, without dismantling the chain.



**Chains
Material**



Sprockets



**Magnetic
Corner Tracks**



**Chemical
Resistance**



**Engineering
Information**



Print



Attention
