




Other Series: 879 TAB VG - 879 M VG - 882 TAB VG - 882 M VG - 1873 VG

878 TAB VG SIDEFLEXING CHAINS **with high friction surface**

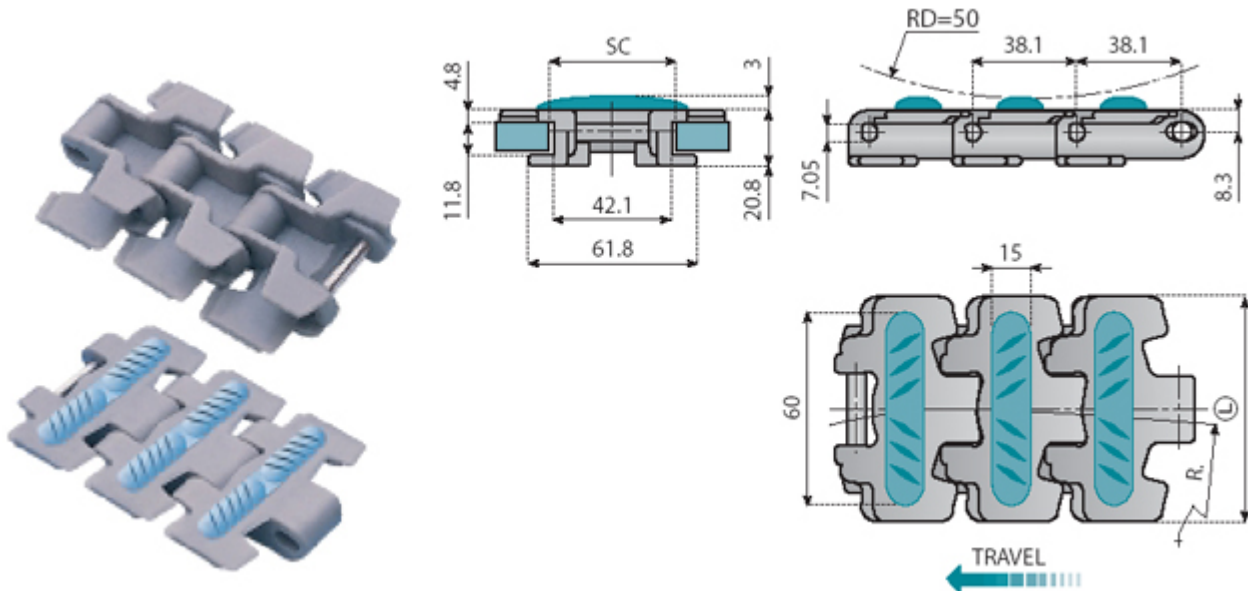

CHAIN - REF.	CODE	Material		Breaking Load N	Width L		R min.	SC		Weight Kg/m
		Plate	Rubber		mm	inch.		Straight	Curving	
NG 878 TAB K325 VG	11391	NG Dark Grey	TPR Water Blue 50 Shore A	5000	82.5	3.1/4	190	46	45	0.89

NG - New Generation ([For further information](#))

TPR - Thermoplastic Rubber

R.190 mm SIDEFLEXING RADIUS

SPECIAL CONFIGURATIONS ON REQUEST

Indicate the distance between the rubber pads at the time of ordering.

Standard length:

80 pitches (10 Ft. - 3.048 m)

Applications:

Food and beverage industry: Conveying products on inclined conveyors (can, bottle).
Packaging lines with inclined-declined conveyors (paper, board boxes PET bottle packs in heat shrink film - cans in heat shrink film - pasta bags)

Characteristics:

Series LF878 sideflexing chains are produced with high friction pads.
Turning disks can be used, as the chain is designed to particulate around a very small curving radius.

Pin material:

Austenitic Steel



**Chain
Material**



Sprockets



**Corner
Tracks**



**Straight
Tracks**



**Turning
disks I°**



**Turning
disks II°**



**Chemical
Resistance**



Print



Attention