





Other Series: CC 600 P / CC 600 TAB P - CC 600 F / CC 631 TAB - CC 1400 / CC 1400 TAB

CC 600 - CC 600 TAB CRATE CONVEYOR CHAINS

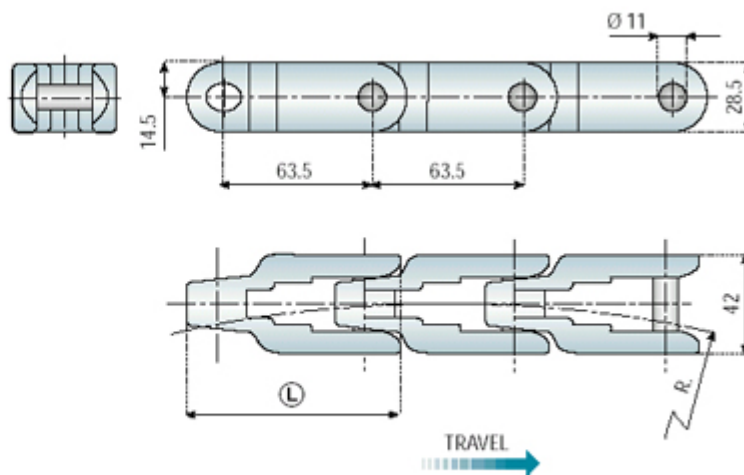

CC 600

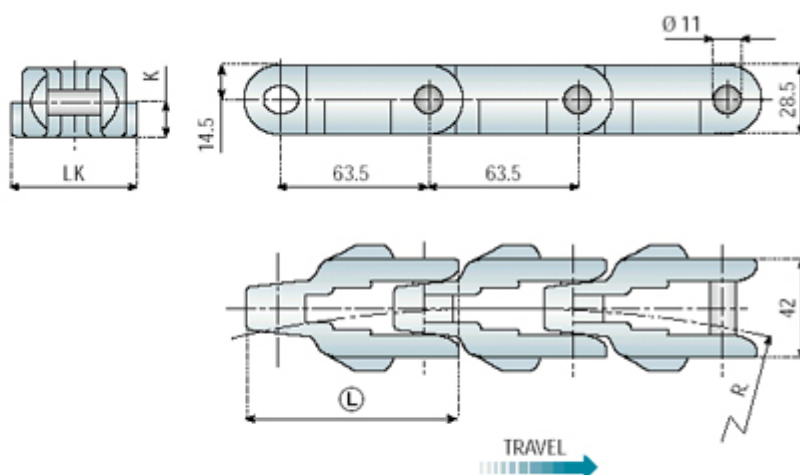

CC 600 TAB

CHAIN - REF.	CODE	Material		R min.	L mm	K mm	LK mm	Breaking Load N	Weight Kg/m
		Plate	Pin						
C 600	11025	CI	SS	760	92	14.2	53.4	55000	5.22
C 600 TAB	11026								5.70
CC 600	11007	W		700	90	17	54	14000	1.33
CC 600 TAB	11009								1.49
NG 600	11027	NG						12500	1.33
NG 600 TAB	11028								1.49

CI - Cast Iron

W - Acetal Resin (white) ([For further information](#))

NG - New Generation (green) ([For further information](#))

SS - Stainless Steel

Standard length:

48 pitches (10 Ft - 3.05 m)

Application:

- Transportation of plastic crates
- General purpose conveying applications

Advantages:

- High strength
- Curving radius capability
- Matt uniform finish
- Very high wear resistance



Chains Material



Sprockets



Chemical Resistance



Engineering Information



[Print](#)



[Attention](#)
