




Other Series: 1701 TAB OP M / 1702 M - HMGK 50 M / HMGK 50 TAB M - HMGK 50 TAB P

HMGK 50 H - HMGK 50 TAB H MULTIFLEX CHAINS

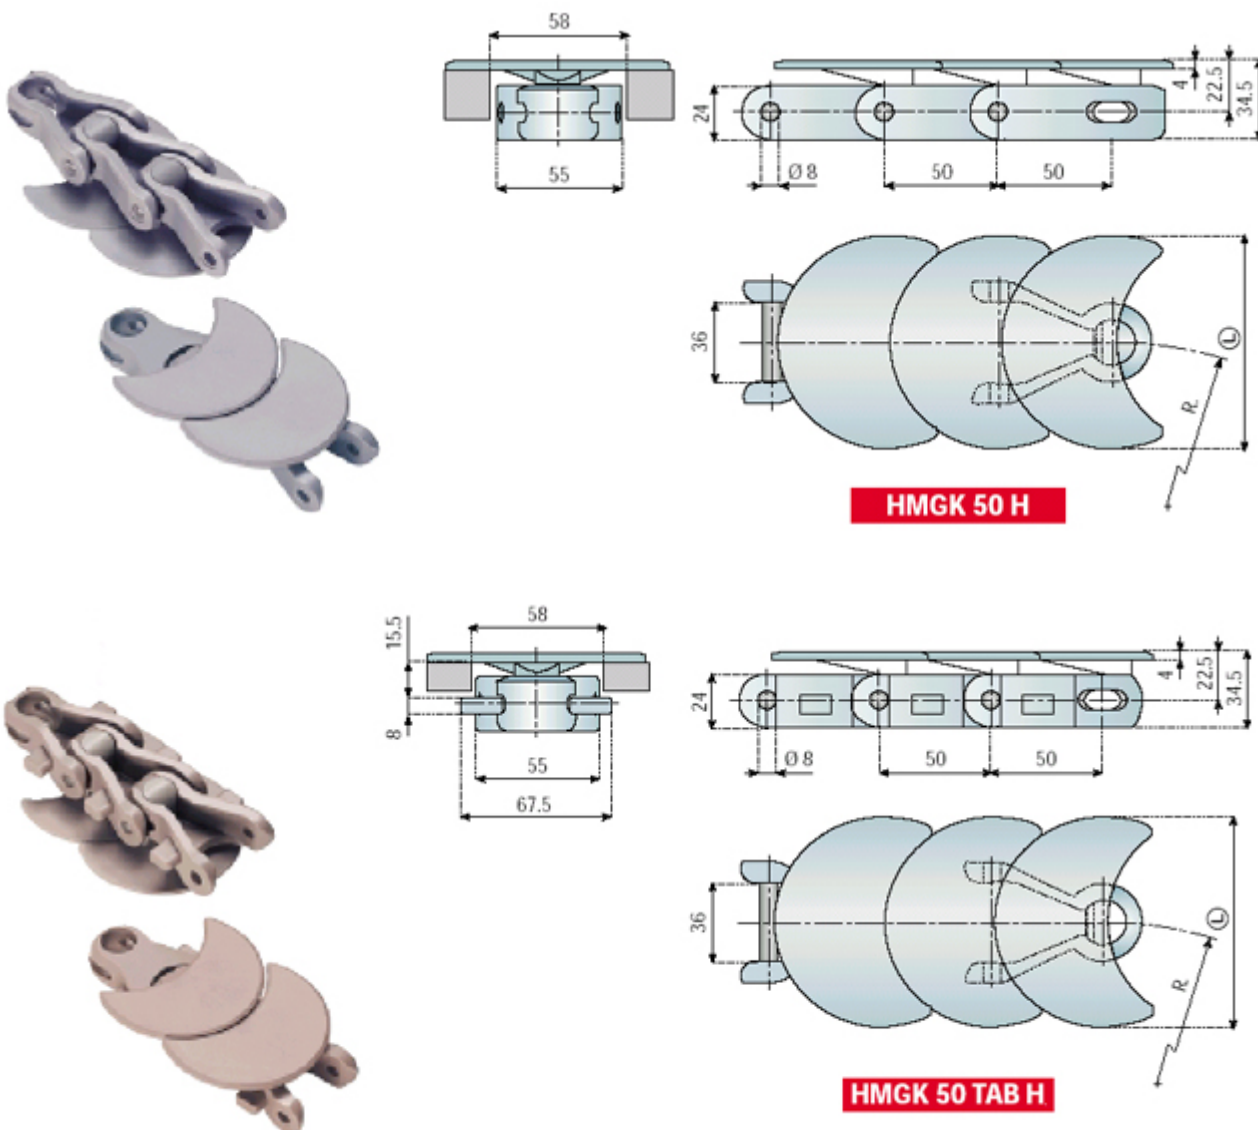

CHAIN - REF.	CODE	Material		R min.	L mm	Breaking Load N	Weight Kg/m
		Plate	Pin				
D-HMGK 50 H1	11880	D	SS	160	95	10500	1.92
D-HMGK 50 H2	11978			500	190		2.35
LFW-HMGK 50 H1	11890	LFW		160	95		1.92
LFW-HMGK 50 H2	11979			500	190		2.35
D-HMGK 50 TAB H1	11900	D		160	95		1.92
D-HMGK 50 TAB H2	11980			500	190		2.35
LFW-HMGK 50 TAB H1	11910	LFW		160	95		1.92
LFW-HMGK 50 TAB H2	11981			500	190		2.35

D - Acetal Resin (light grey) ([For further information](#))

LFW - Low Friction Acetal Resin (white) ([For further information](#))

SS - Stainless Steel

Standard length:

61 pitches (10 Ft - 3.05 m)

Application:

- Dairy industry conveying of milk cartons.
- Elevation or lowering products with possibility of accumulation
- Preserving and mechanical industries.

Advantages:

- Multi-directional flexibility
- Horizontal e vertical directions
- Small sideflexing radius
- High working load
- Consistent high quality
- Long wear life
- Low coefficient of friction



**Chain
Material**



Sprockets



**Corner
Tracks**



**Straight
Tracks**



**Turning
disks**



**Chemical
Resistance**



[Print](#)



[Attention](#)
