





Other Series: 1701 TAB OP M / 1702 M - HMGK 50 TAB P - HMGK 50 H - HMGK 50 TAB H


HMGK 50 M - HMGK 50 TAB M MULTIFLEX CHAINS WITH PUSHER

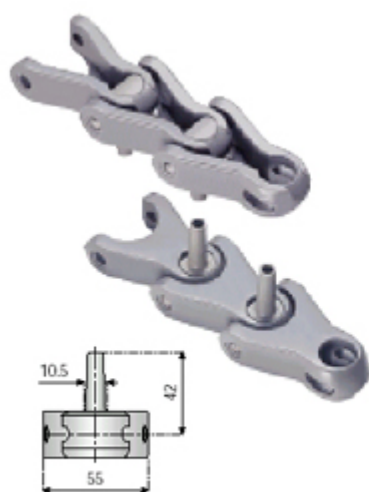




M1 (pusher white)






M2 (pusher white)



M3 (pusher white)

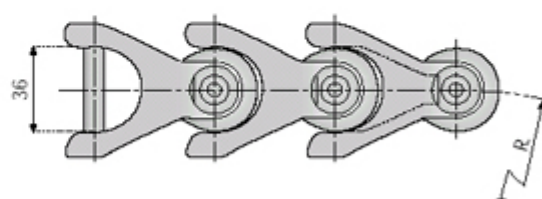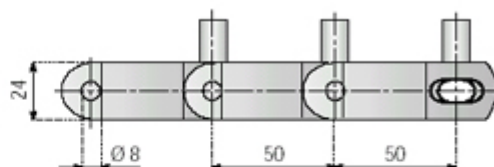

HMGK 50 M

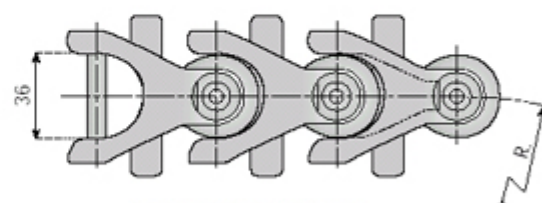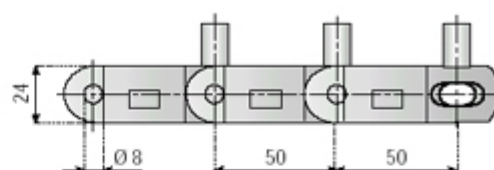

HMGK 50 TAB M

CHAIN - REF.	CODE	Material		Pusher type	R min.	Breaking Load N	Weight Kg/m
		Plate	Pin				
W HMGK 50 M1	11970	W	SS	M1	145	8500	2.0
W HMGK 50 M2	11971			M2			2.3
W HMGK 50 M3	11972			M3			1.6
W HMGK 50 TAB M1	11973			M1	160		2.0
W HMGK 50 TAB M2	11974			M2			2.3
W HMGK 50 TAB M3	11975			M3			1.6

W - Acetal Resin (white) ([For further information](#))

SS - Stainless Steel

Standard length:

61 pitches (10 Ft - 3.05 m)

Application:

- Dairy industry conveying of milk cartons.
- Elevation or lowering products
- Preserving and mechanical industries.

Advantages:

- Multi-directional flexibility
- Horizontal e vertical directions
- Small sideflexing radius
- High working load
- Consistent high quality
- Long wear life
- Low coefficient of friction



**Chain
Material**



Sprockets



**Corner
Tracks**



**Straight
Tracks**



**Turning
disks**



**Chemical
Resistance**



Print



Attention