

Polyethylene wear strip






Polyethylene

WEAR STRIP

Material:

Extruded ultra high molecular weight polyethylene.
Max. continuous service temperature in air 90° C.
Water absorption coefficient = 0.

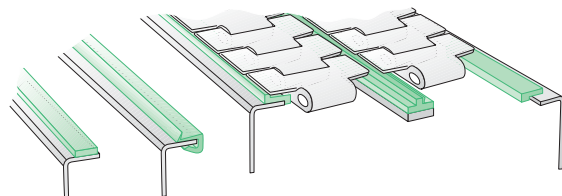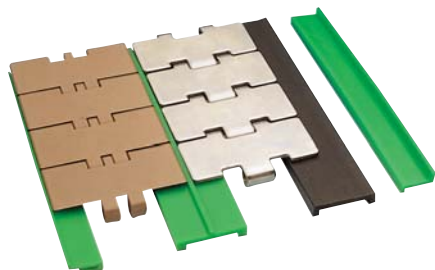

WEAR STRIP

Supply: coils.

Packaging: 60 meters.

Code



19001N

19001V

Colour

Black

Green



WEAR STRIP

Supply: coils.

Packaging: 60 meters.

Code



19005N

19005V

Colour

Black

Green



WEAR STRIP

Supply: coils.

Packaging: 60 meters.

Notes: applicable from 2.5 to 4 mm thick sheet metal.

Code

19007N

19007V


Colour

Black

Green



New design



Polyethylene wear strip






Polyethylene


WEAR STRIP

Material:

Extruded ultra high molecular weight polyethylene.
Max. continuous service temperature in air 90° C.
Water absorption coefficient = 0.

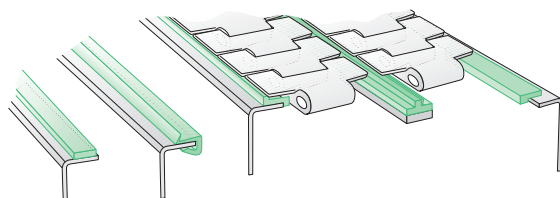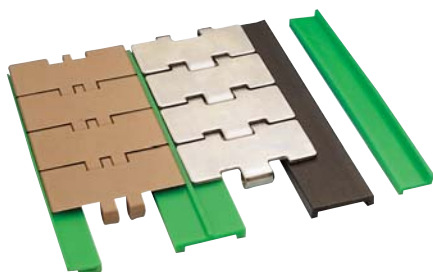

New design



WEAR STRIP

Supply: coils.

Packaging: 60 meters.


Notes: applicable from 2.5 to 4 mm thick sheet metal.

Code

19003N
19003V

Colour

Black
Green



WEAR STRIP

Supply: 6 m bars.



Packaging: 60 meters.

Code

19091N
19091V

Colour

Black
Green



WEAR STRIP

Supply: coils.


Packaging: 60 meters.

Code

19004N
19004V

Colour

Black
Green






Polyethylene wear strip

WEAR STRIP

Material:

Extruded ultra high molecular weight polyethylene.
Max. continuous service temperature in air 90° C.
Water absorption coefficient = 0.

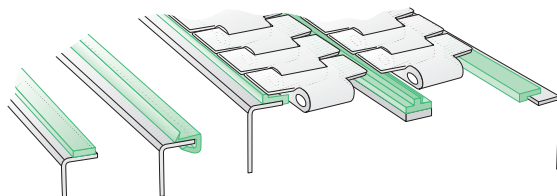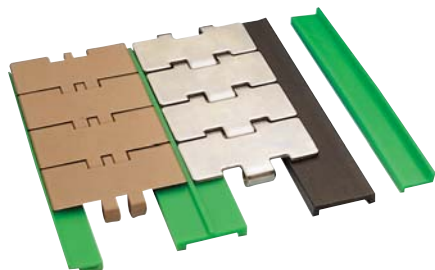

WEAR STRIP

Supply: coils.

Packaging: 60 meters.


Notes: use for spacer code 14349.

Code

19067N
19067V

Colour

Black
Green



Code


19008N
19008V
19009N
19009V
19010N
19010V
19011N
19011V
19012N
19012V
19013N
19013V
19014SN
19014SV
19014N
19014V

Colour

Black
Green
Black
Green
Black
Green
Black
Green
Black
Green
Black
Green
Black
Green
Black
Green

L x H mm


20 x 3
20 x 3
20 x 5
20 x 5
25 x 3
25 x 3
30 x 3
30 x 3
40 x 3
40 x 3
50 x 3
50 x 3
60 x 3
60 x 3
70 x 3
70 x 3



WEAR STRIP

Supply: coils.

Packaging: 60 meters.

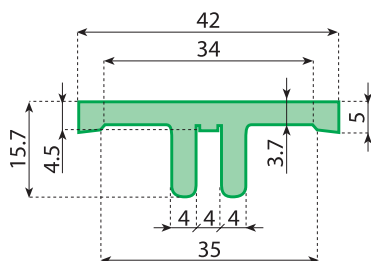


Code

19093N
19093V
19093B

Colour

Black
Green
White

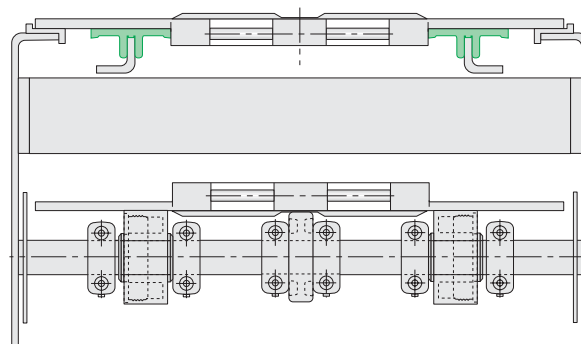

WEAR STRIP

Supply: 3 m. bars.

Packaging: 30 meters.

Chain guide wear strip




WEAR STRIP

Material:

Extruded ultra high molecular weight polyethylene.
Max. continuous service temperature in air 90° C.
Water absorption coefficient = 0.



Polyethylene

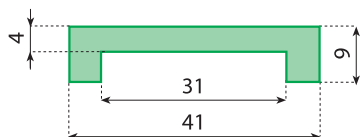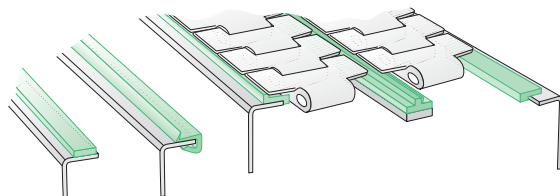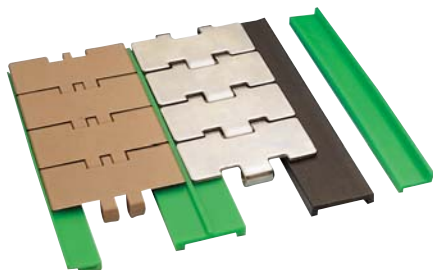

WEAR STRIP

Supply: 6 m. bars.

Packaging: 30 meters.

Code



19045N

19045V

Colour

Black

Green

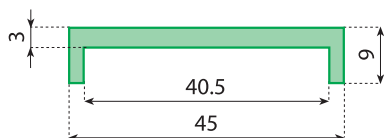

WEAR STRIP

Supply: 6 m. bars.

Packaging: 30 meters.

Code



19075N

19075V

Colour

Black

Green

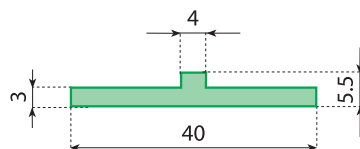

WEAR STRIP

Supply: coils.

Packaging: 60 meters.

Code


19002N

19002V

Colour

Black

Green



Polyethylene wear strip




WEAR STRIP

Material:

Extruded ultra high molecular weight polyethylene.
Max. continuous service temperature in air 90° C.
Water absorption coefficient = 0.



Polyethylene

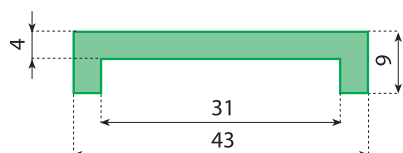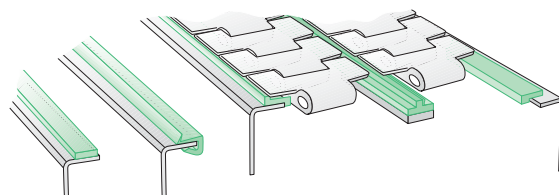
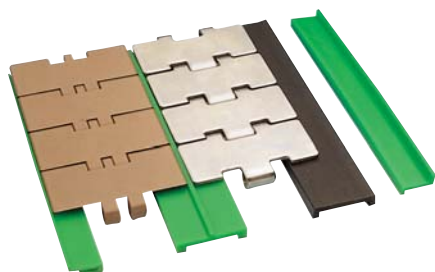


WEAR STRIP

Supply: coils.

Packaging: 60 meters.

Code	Colour
19006LN	Black
19006VN	Green

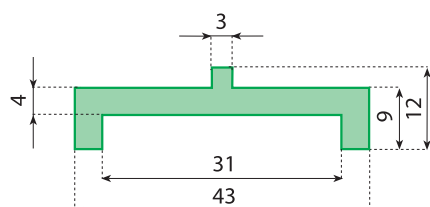



WEAR STRIP

Supply: coils.

Packaging: 60 meters.

Code	Colour
19006N	Black
19006V	Green

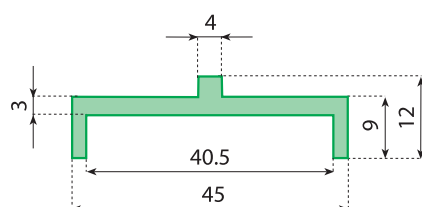

WEAR STRIP

Supply: 6 m. bars.

Packaging: 30 meters.

Code	Colour
19076N	Black
19076V	Green

