

Chain guide wear strip



CHAIN GUIDE WEAR STRIPS

Material:

- Metal profile in anodized aluminium.
- Wear strip in UHMWPE.

Characteristics:

- Very low friction coefficient.
- Moderate resistance to chemical agents.
- No liquid absorption.

Supply:

- 3 or 6 meters.
- Metal profile and wear strip are supplied assembled.

Application:

- As chain guide (carry and return).
- As side guide.



Polyethylene




Polyethylene antistatic



Anodized aluminium




Accessories



ALUMINIUM PROFILE

Supply: 3 or 6 meters.

Packaging: 30 meters.

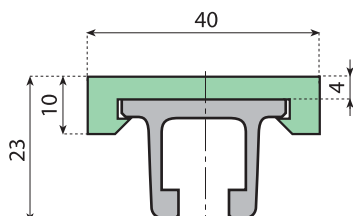


CHAIN GUIDE WEAR STRIP

Supply: 3 or 6 meters.

Packaging: 30 meters.

Notes: the aluminium profile and wear strip are supplied assembled.

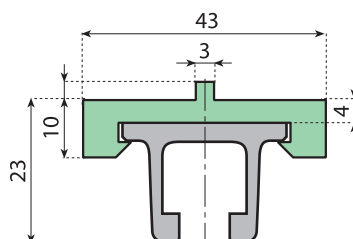

CHAIN GUIDE WEAR STRIP

Supply: 3 or 6 meters.

Packaging: 30 meters.

Notes: the aluminium profile and wear strip are supplied assembled.


Code	Length	Weight Kg/m
19097L	3 m	0.50
19097	6 m	0.50

Code	Colour	Length	Weight Kg/m
19098N	Black	3 m	0.68
19098NL	Black	6 m	0.68
19098V	Green	3 m	0.68
19098VL	Green	6 m	0.68
19098B	White	3 m	0.68
19098BL	White	6 m	0.68
19098AS	Antistatic black	3 m	0.68
19098ASL	Antistatic black	6 m	0.68

Code	Colour	Length	Weight Kg/m
19119N	Black	3 m	0.70
19119NL	Black	6 m	0.70
19119V	Green	3 m	0.70
19119VL	Green	6 m	0.70
19119B	White	3 m	0.70
19119BL	White	6 m	0.70
19119AS	Antistatic black	3 m	0.70
19119ASL	Antistatic black	6 m	0.70

These profiles are applicable to code 19097 - 19097L

cod. 19070 - 19071



cod. 19072 - 19073

