


Series FC

Flanged bearing support for shouldered shafts d 30-35 mm

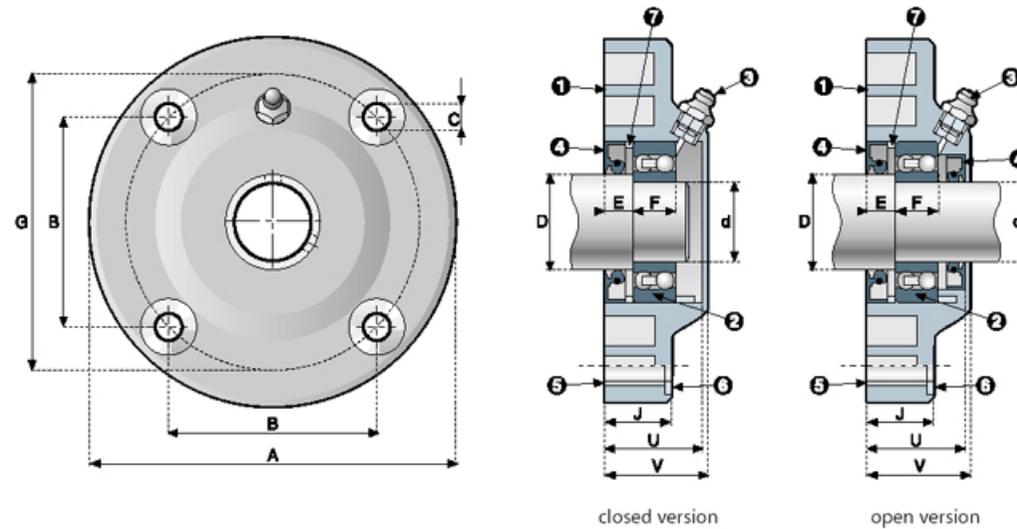

COMPONENTS

- 1 Housing in plastic material.
- 2 Radial ball bearing, pre-lubricated by means of grease-nipple or a quick coupler.
- 3 Ball-type grease-nipple (available upon request) quick coupler to take semi-rigid hoses \varnothing 4 mm in Rilsan ([see accessories](#)).
- 4 Rotary shaft seal ring with extra dust-protection lip.
- 5 Spacers to reinforce bolt holes.
- 6 Washer UNI 6592.
- 7 Spacer.

Ø d mm	CODE VERSION		DIMENSIONS (mm)										BEARING LOAD RATINGS		MAX RADIAL LOAD CAPACITY ON PLASTIC HOUSING (N)	WEIGHT (Kg)
	CLOSED	OPEN	A	B	C	D	E	F	G	J	U	V	DYNAMIC C (N)	STATIC Co (N)		

FLANGED BEARING FOR SHOULDERED SHAFTS VERSION IN POLYAMIDE - PA -																
30	51206C	56206C	137	78	11	35	10	16	110	25	37	39	15500	5500	13000	0.60
35	51207C	56207C	137	78	11	40	10	17	110	25	37	39	15900	6500	12800	0.72

FLANGED BEARING FOR SHOULDERED SHAFTS VERSION IN POLYPROPYLENE - PP -																
30	61206C	66206C	137	78	11	35	10	16	110	25	37	39	15500	5500	6000	0.60
35	61207C	66207C	137	78	11	40	10	17	110	25	37	39	15900	6500	6000	0.72

The dimension of the housings related to codes printed in bold letters are unified according to international standards.

COLOUR

- Bearing support in black.
- For sufficient quantities parts can be produced in different colours.