


Series F

Flanged bearing support for shouldered shafts d 25-30-35-40 mm

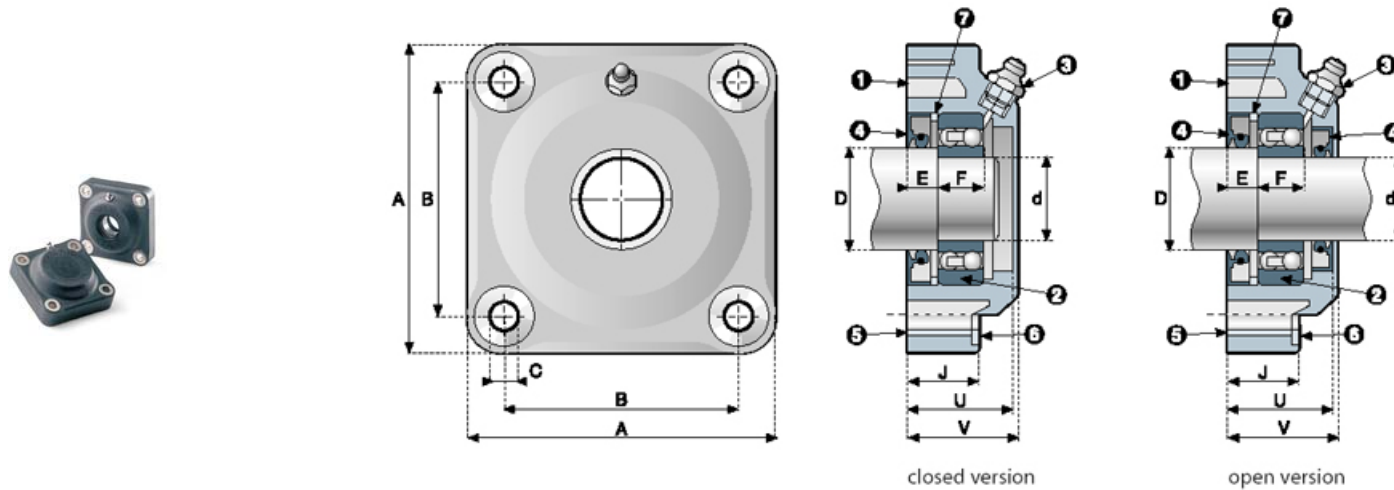

COMPONENTS

- 1 Housing in plastic material.
- 2 Radial ball bearing, pre-lubricated by means of grease-nipple or a quick coupler.
- 3 Ball-type grease-nipple (available upon request) quick coupler to take semi-rigid hoses Ø 4 mm in Rilsan ([see accessories](#)).
- 4 Rotary shaft seal ring with extra dust-protection lip.
- 5 Spacers to reinforce bolt holes.
- 6 Washer UNI 6592.
- 7 Spacer.

Ø d mm	CODE VERSION		DIMENSIONS (mm)									BEARING LOAD RATINGS		MAX RADIAL LOAD CAPACITY ON PLASTIC HOUSING (N)	WEIGHT (Kg)
	CLOSED	OPEN	A	B	C	D	E	F	J	U	V	DYNAMIC C (N)	STATIC Co (N)		

FLANGED BEARING FOR SHOULDERED SHAFTS VERSION IN POLYAMIDE - PA -															
25	51205A	56205A	98	70	11	30	11	15	25	33	36	12000	4000	12900	0.40
25	51205	56205	110	83	11	30	10	15	25	37	39	12000	4000	13000	0.50
30	51206	56206	110	83	11	35	11	16	25	37	39	15500	5500	12000	0.56
35	51207	56207	110	83	11	40	10	17	25	37	39	15900	6500	11500	0.67
40	51208	56208	110	83	11	45	6	18	25	37	39	19000	8000	11500	0.76

FLANGED BEARING FOR SHOULDERED SHAFTS VERSION IN POLYPROPYLENE - PP -															
25	61205A	66205A	98	70	11	30	11	15	25	33	36	12000	4000	6000	0.40
25	61205	66205	110	83	11	30	10	15	25	37	39	12000	4000	6200	0.50
30	61206	66206	110	83	11	35	11	16	25	37	39	15500	5500	5600	0.56
35	61207	66207	110	83	11	40	10	17	25	37	39	15900	6500	5300	0.67
40	61208	66208	110	83	11	45	6	18	25	37	39	19000	8000	5000	0.76

The dimension of the housings related to codes printed in bold letters are unified according to international standards.

COLOUR

- Bearing support in black.
- For sufficient quantities parts can be produced in different colours.