


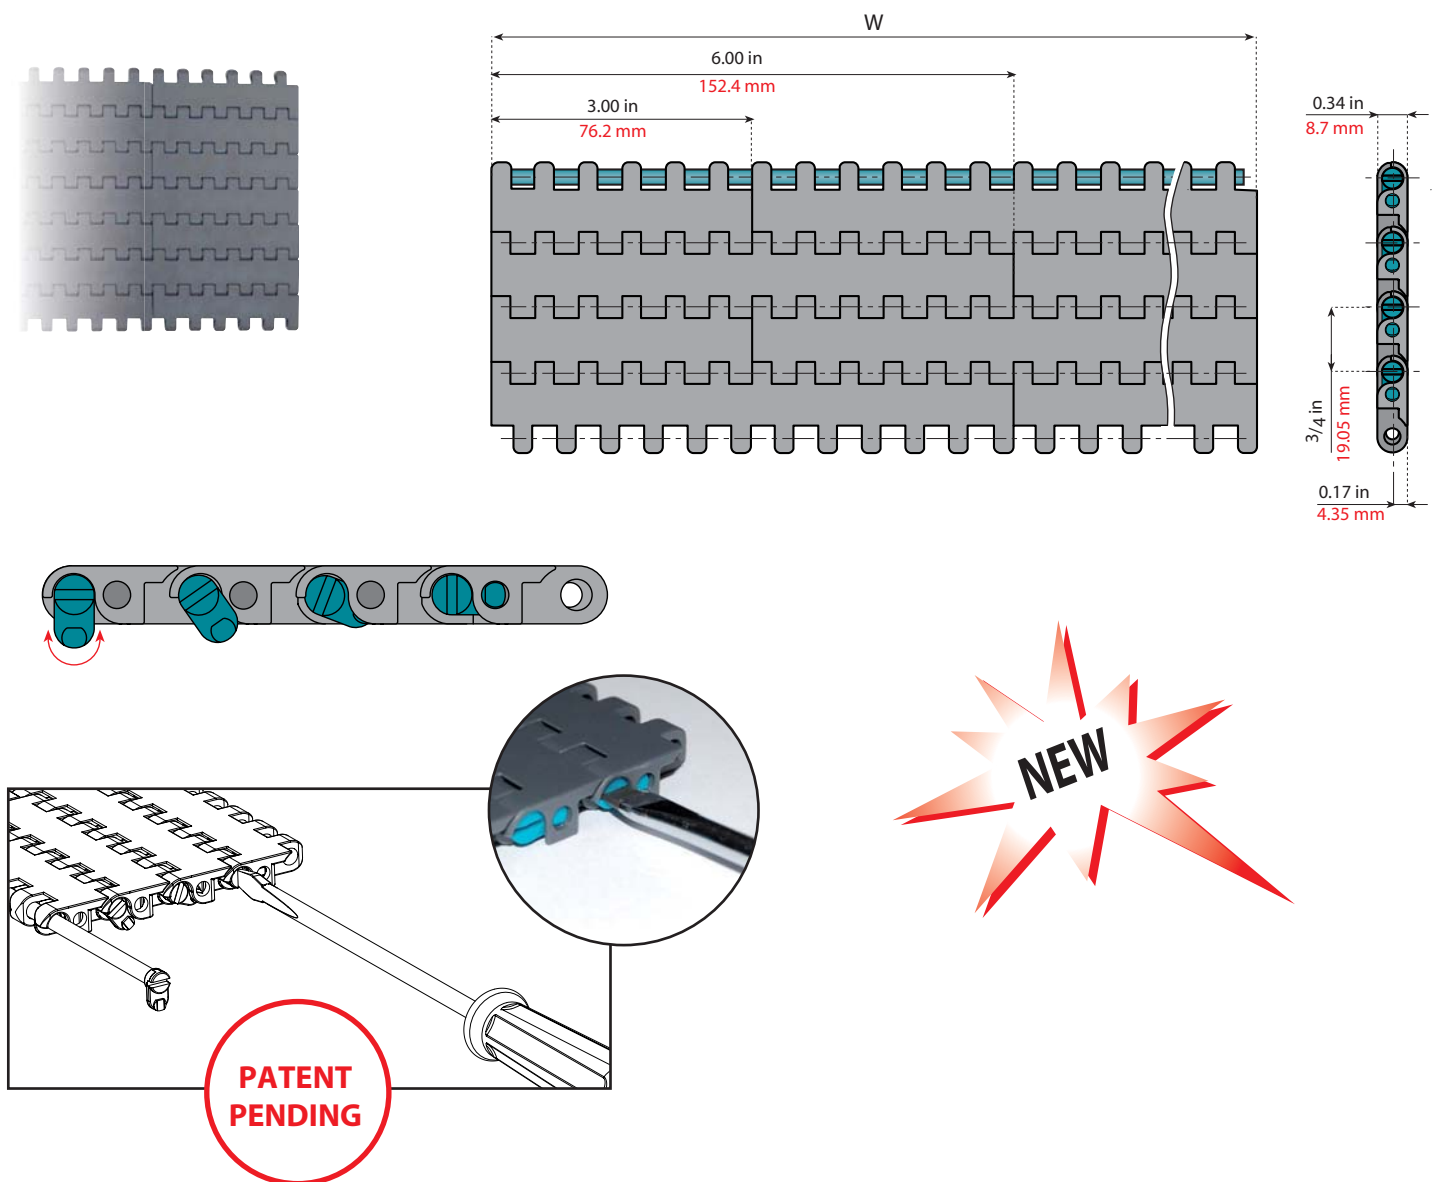

Backflex radius: 20 mm - 0.79 inch.

Max load capacity: 30.000 N/m - 2.056 lbs/ft

Weight: 7.4 Kg/m² - 1.5 lb/ft²

Standard length: 160 pitches (10 ft - 3.048 m)

Pin material: PBT (water blue)



Standard materials

LFG	NGG
Low Friction Acetal Resin	New Generation

On request and for adequate quantities
these chains can be produced in:

XPG	PP	AS
Extra Performance	Polypropylene	Anti-static Acetal Resin

FOR BELTS AVAILABLE IN "NGG" MATERIAL JUST ADD "NGG" TO PART NUMBER (EXAMPLE "CODE 261300-NGG")

Width W		Belts Ref.	Code	Width W		Belts Ref.	Code	Width W		Belts Ref.	Code	Width W		Belts Ref.	Code
inch	mm			inch	mm			inch	mm			inch	mm		
3.00	76	2190-0003 FT	261300	33.00	838	2190-0033 FT	261310	63.00	1600	2190-0063 FT	261320	93.00	2362	2190-0093 FT	261330
6.00	152	2190-0006 FT	261301	36.00	914	2190-0036 FT	261311	66.00	1676	2190-0066 FT	261321	96.00	2438	2190-0096 FT	261331
9.00	229	2190-0009 FT	261302	39.00	991	2190-0039 FT	261312	69.00	1753	2190-0069 FT	261322	99.00	2515	2190-0099 FT	261332
12.00	305	2190-0012 FT	261303	42.00	1067	2190-0042 FT	261313	72.00	1829	2190-0072 FT	261323	102.00	2591	2190-0102 FT	261333
15.00	381	2190-0015 FT	261304	45.00	1143	2190-0045 FT	261314	75.00	1905	2190-0075 FT	261324	105.00	2667	2190-0105 FT	261334
18.00	457	2190-0018 FT	261305	48.00	1219	2190-0048 FT	261315	78.00	1981	2190-0078 FT	261325	108.00	2743	2190-0108 FT	261335
21.00	533	2190-0021 FT	261306	51.00	1295	2190-0051 FT	261316	81.00	2057	2190-0081 FT	261326	111.00	2819	2190-0111 FT	261336
24.00	610	2190-0024 FT	261307	54.00	1372	2190-0054 FT	261317	84.00	2134	2190-0084 FT	261327	114.00	2896	2190-0114 FT	261337
27.00	686	2190-0027 FT	261308	57.00	1448	2190-0057 FT	261318	87.00	2210	2190-0087 FT	261328	117.00	2972	2190-0117 FT	261338
30.00	762	2190-0030 FT	261309	60.00	1524	2190-0060 FT	261319	90.00	2286	2190-0090 FT	261329	120.00	3048	2190-0120 FT	261339

Other widths available on request.