


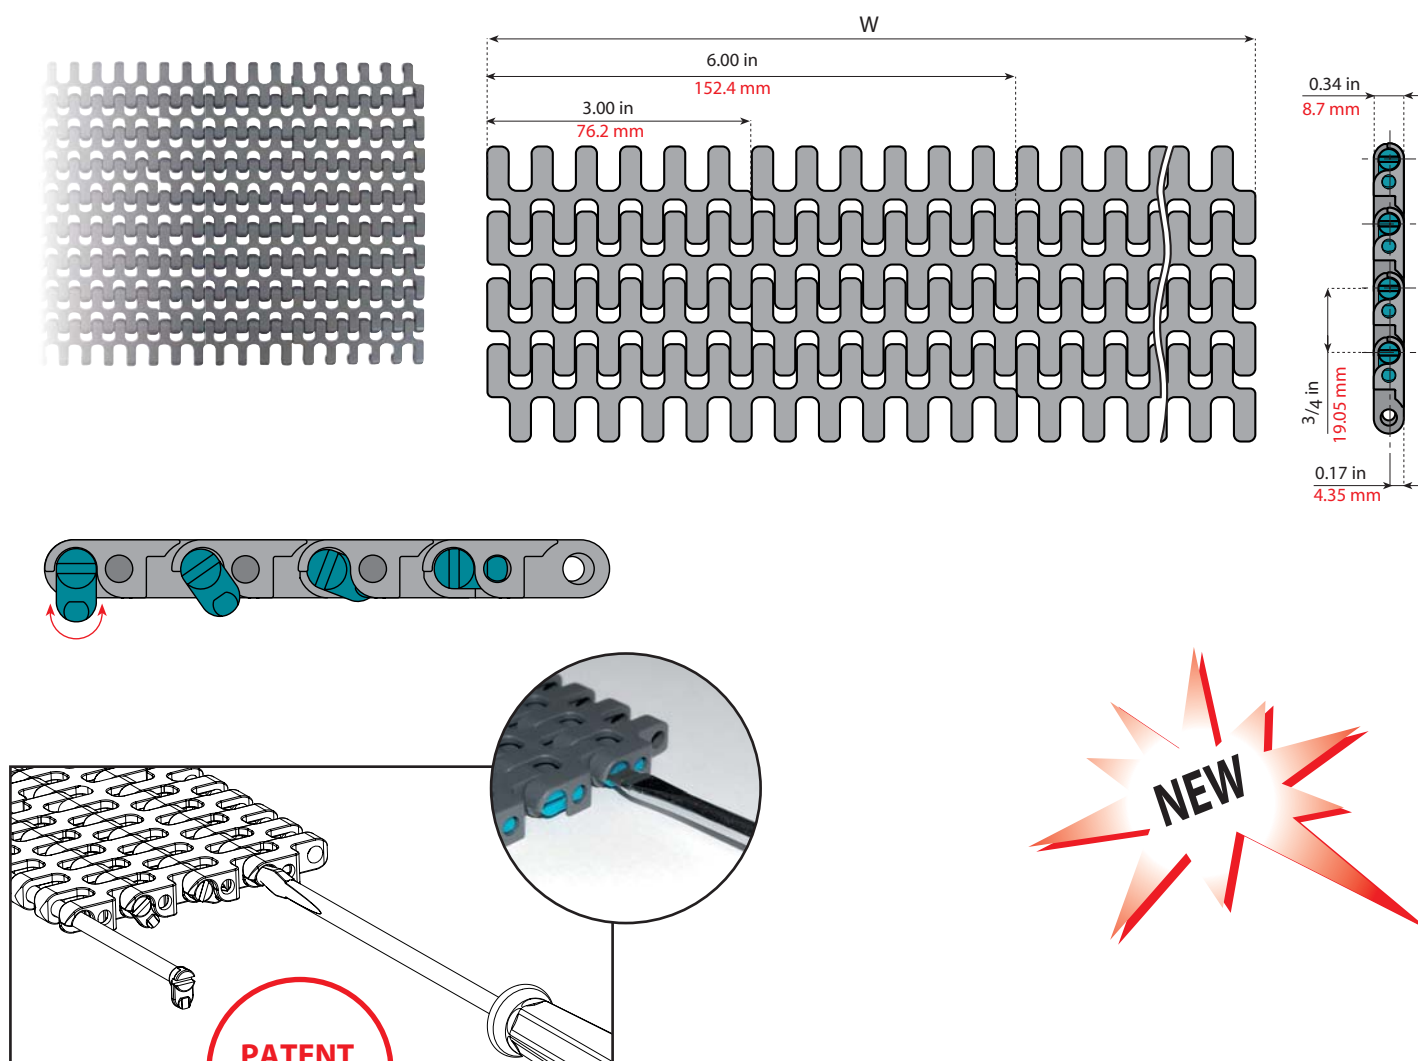

Backflex radius: 20 mm - 0.79 inch.
Max load capacity: 30.000 N/m - 2.056 lbs/ft
Weight: 6.4 Kg/m² - 1.3 lb/ft²
Standard length: 160 pitches (10 ft - 3.048 m)
Pin material: PBT (water blue)
Open surface: 19%

MATERIAL Pages 4 - 7
Pages 311
Pages 333⇒337

Standard materials

LFG	NGG
Low Friction Acetal Resin	New Generation

On request
 and for adequate quantities these chains can be produced in:

XPG	PP	AS	DK
Extra Performance	Polypropylene	Anti-static Acetal Resin	Delrin Kevlar

FOR BELTS AVAILABLE IN "NGG" MATERIAL JUST ADD "NGG" TO PART NUMBER (EXAMPLE "CODE 261350-NGG")

Width W		Belts Ref.	Code	Width W		Belts Ref.	Code	Width W		Belts Ref.	Code	Width W		Belts Ref.	Code
inch	mm			inch	mm			inch	mm			inch	mm		
3.00	76	2190-0003 FG	261350	33.00	838	2190-0033 FG	261360	63.00	1600	2190-0063 FG	261370	93.00	2362	2190-0093 FG	261380
6.00	152	2190-0006 FG	261351	36.00	914	2190-0036 FG	261361	66.00	1676	2190-0066 FG	261371	96.00	2438	2190-0096 FG	261381
9.00	229	2190-0009 FG	261352	39.00	991	2190-0039 FG	261362	69.00	1753	2190-0069 FG	261372	99.00	2515	2190-0099 FG	261382
12.00	305	2190-0012 FG	261353	42.00	1067	2190-0042 FG	261363	72.00	1829	2190-0072 FG	261373	102.00	2591	2190-0102 FG	261383
15.00	381	2190-0015 FG	261354	45.00	1143	2190-0045 FG	261364	75.00	1905	2190-0075 FG	261374	105.00	2667	2190-0105 FG	261384
18.00	457	2190-0018 FG	261355	48.00	1219	2190-0048 FG	261365	78.00	1981	2190-0078 FG	261375	108.00	2743	2190-0108 FG	261385
21.00	533	2190-0021 FG	261356	51.00	1295	2190-0051 FG	261366	81.00	2057	2190-0081 FG	261376	111.00	2819	2190-0111 FG	261386
24.00	610	2190-0024 FG	261357	54.00	1372	2190-0054 FG	261367	84.00	2134	2190-0084 FG	261377	114.00	2896	2190-0114 FG	261387
27.00	686	2190-0027 FG	261358	57.00	1448	2190-0057 FG	261368	87.00	2210	2190-0087 FG	261378	117.00	2972	2190-0117 FG	261388
30.00	762	2190-0030 FG	261359	60.00	1524	2190-0060 FG	261369	90.00	2286	2190-0090 FG	261379	120.00	3048	2190-0120 FG	261389

Other widths available on request.