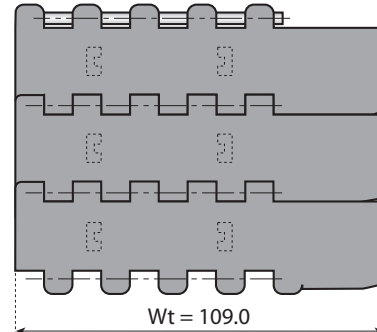
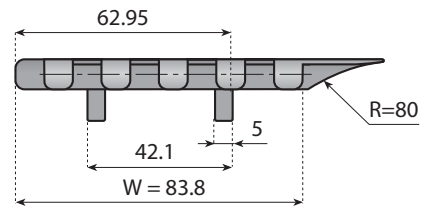
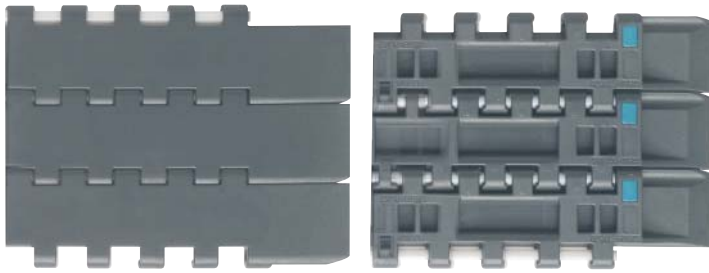


Version with two positioner wing
Pin material: PBT (white)

Standard materials

LFG	NGG
Low Friction Acetal Resin	New Generation

On request and for adequate quantities these chains can be produced in:

XPG	PP	AS
Extra Performance	Polypropylene	Anti-static Acetal Resin



Pages 4→7



Pages 312→314




Pages 333→337


Belts - Ref.	Code	Material	Width W		Pitch P		Backflex radius mm	Max load capacity N/m	Weight Kg/m ²
			mm	inch	mm	inch			
LFG 2250 K330 FTTP2	25002	LFG Dark Grey	83.8	3.30	25.4	1.00	30	25.000	6.50
NGG 2250 K330 FTTP2	25002NGG	NGG Light Grey							

Standard length: 120 pitches (10 ft. - 3.048 m)

EXAMPLE INSTALLATION

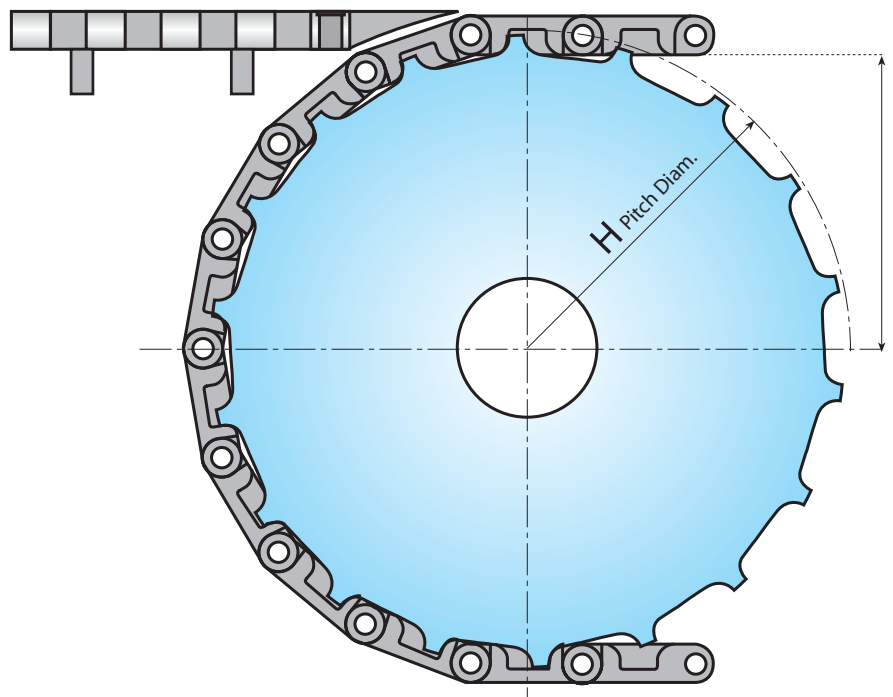

For further information contact our
Technical Support
Department

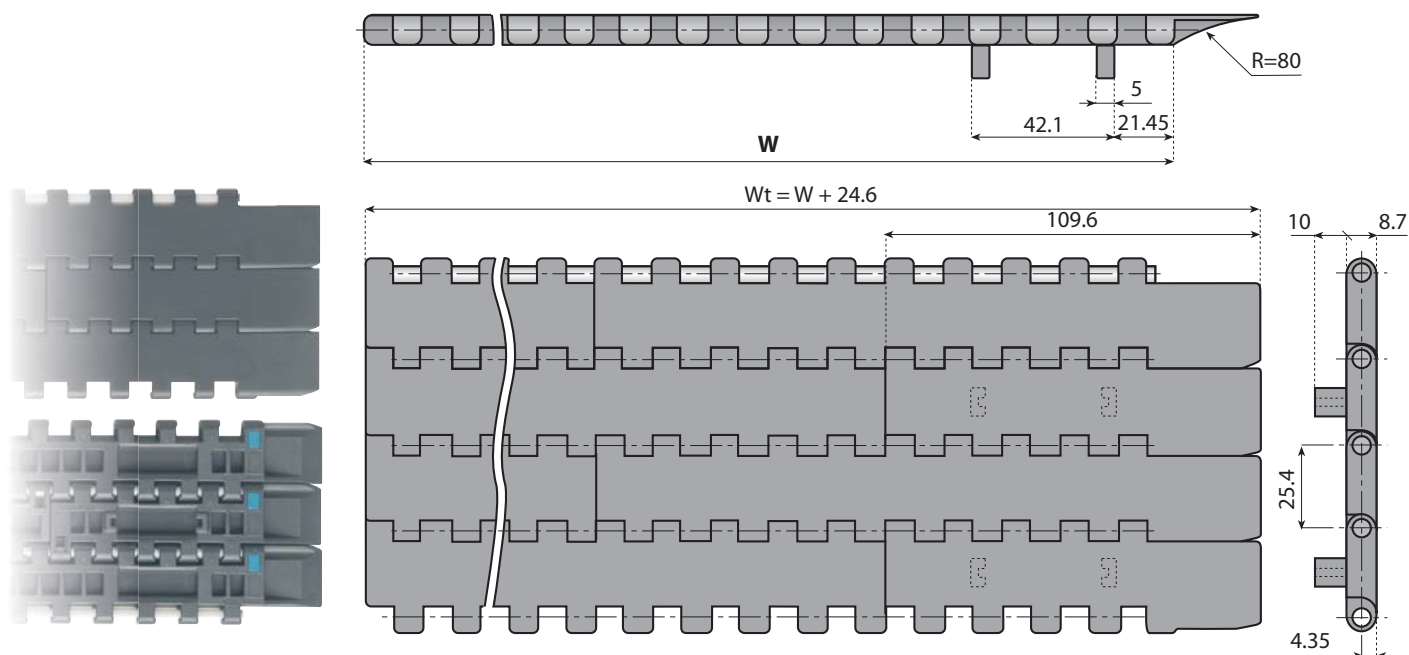

Version with two positioners and integrated active transfer wing

Backflex radius: 30 mm

Max load capacity: 25.000 N/m

Weight: 9.60 Kg/m²

Standard length: 120 pitches
(10 ft - 3.048 m)

Pin material: PBT (white)



Pages
4⇒7



Pages
312⇒314



Pages
333⇒337

Standard materials

LFG	NGG
Low Friction Acetal Resin	New Generation


On request and for adequate quantities
these chains can be produced in:

XPG	PP	AS
Extra Performance	Polypropylene	Anti-static Acetal Resin

FOR BELTS AVAILABLE IN "NGG" MATERIAL JUST ADD "NGG" TO PART NUMBER (EXAMPLE "CODE 25401-NGG")

Width W mm	Belts Ref.	Code	Width W mm	Belts Ref.	Code	Width W mm	Belts Ref.	Code	Width W mm	Belts Ref.	Code
85	2250-0085 FFTP2	25400	935	2250-0935 FFTP2	25410	1785	2250-1785 FFTP2	25420	2635	2250-2635 FFTP2	25430
170	2250-0170 FFTP2	25401	1020	2250-1020 FFTP2	25411	1870	2250-1870 FFTP2	25421	2720	2250-2720 FFTP2	25431
255	2250-0255 FFTP2	25402	1105	2250-1105 FFTP2	25412	1955	2250-1955 FFTP2	25422	2805	2250-2805 FFTP2	25432
340	2250-0340 FFTP2	25403	1190	2250-1190 FFTP2	25413	2040	2250-2040 FFTP2	25423	2890	2250-2890 FFTP2	25433
425	2250-0425 FFTP2	25404	1275	2250-1275 FFTP2	25414	2125	2250-2125 FFTP2	25424	2975	2250-2975 FFTP2	25434
510	2250-0510 FFTP2	25405	1360	2250-1360 FFTP2	25415	2210	2250-2210 FFTP2	25425	3060	2250-3060 FFTP2	25435
595	2250-0595 FFTP2	25406	1445	2250-1445 FFTP2	25416	2295	2250-2295 FFTP2	25426	3145	2250-3145 FFTP2	25436
680	2250-0680 FFTP2	25407	1530	2250-1530 FFTP2	22417	2380	2250-2380 FFTP2	25427	3230	2250-3230 FFTP2	25437
765	2250-0765 FFTP2	25408	1615	2250-1615 FFTP2	25418	2465	2250-2465 FFTP2	25428	3315	2250-3315 FFTP2	25438
850	2250-0850 FFTP2	25409	1700	2250-1700 FFTP2	25419	2550	2250-2550 FFTP2	25429	3400	2250-3400 FFTP2	25439

Other widths available on request.

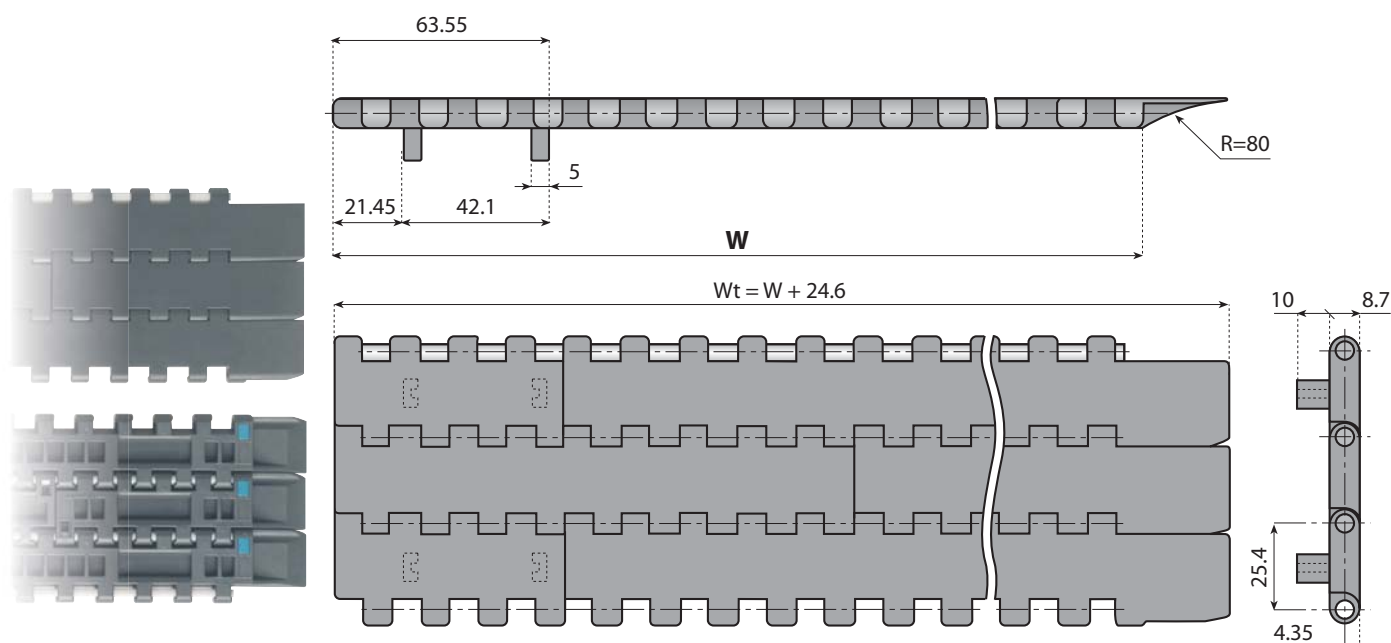

Version with two positioners and integrated active transfer wing

Backflex radius: 30 mm

Max load capacity: 25.000 N/m

Weight: 9.60 Kg/m²

Standard length: 120 pitches
(10 ft - 3.048 m)

Pin material: PBT (white)



Pages
4⇒7



Pages
312⇒314



Pages
333⇒337

Standard materials

LFG	NGG
Low Friction Acetal Resin	New Generation

On request and for adequate quantities
these chains can be produced in:

XPG	PP	AS
Extra Performance	Polypropylene	Anti-static Acetal Resin

FOR BELTS AVAILABLE IN "NGG" MATERIAL JUST ADD "NGG" TO PART NUMBER (EXAMPLE "CODE 25401SX-NGG")

Width W mm	Belts Ref.	Code	Width W mm	Belts Ref.	Code	Width W mm	Belts Ref.	Code	Width W mm	Belts Ref.	Code
85	2250-0085 FFTP2-SX	25400	935	2250-0935 FFTP2-SX	25410SX	1785	2250-1785 FFTP2-SX	25420SX	2635	2250-2635 FFTP2-SX	25430SX
170	2250-0170 FFTP2-SX	25401SX	1020	2250-1020 FFTP2-SX	25411SX	1870	2250-1870 FFTP2-SX	25421SX	2720	2250-2720 FFTP2-SX	25431SX
255	2250-0255 FFTP2-SX	25402SX	1105	2250-1105 FFTP2-SX	25412SX	1955	2250-1955 FFTP2-SX	25422SX	2805	2250-2805 FFTP2-SX	25432SX
340	2250-0340 FFTP2-SX	25403SX	1190	2250-1190 FFTP2-SX	25413SX	2040	2250-2040 FFTP2-SX	25423SX	2890	2250-2890 FFTP2-SX	25433SX
425	2250-0425 FFTP2-SX	25404SX	1275	2250-1275 FFTP2-SX	25414SX	2125	2250-2125 FFTP2-SX	25424SX	2975	2250-2975 FFTP2-SX	25434SX
510	2250-0510 FFTP2-SX	25405SX	1360	2250-1360 FFTP2-SX	25415SX	2210	2250-2210 FFTP2-SX	25425SX	3060	2250-3060 FFTP2-SX	25435SX
595	2250-0595 FFTP2-SX	25406SX	1445	2250-1445 FFTP2-SX	25416SX	2295	2250-2295 FFTP2-SX	25426SX	3145	2250-3145 FFTP2-SX	25436SX
680	2250-0680 FFTP2-SX	25407SX	1530	2250-1530 FFTP2-SX	22417SX	2380	2250-2380 FFTP2-SX	25427SX	3230	2250-3230 FFTP2-SX	25437SX
765	2250-0765 FFTP2-SX	25408SX	1615	2250-1615 FFTP2-SX	25418SX	2465	2250-2465 FFTP2-SX	25428SX	3315	2250-3315 FFTP2-SX	25438SX
850	2250-0850 FFTP2-SX	25409SX	1700	2250-1700 FFTP2-SX	25419SX	2550	2250-2550 FFTP2-SX	25429SX	3400	2250-3400 FFTP2-SX	25439SX

Other widths available on request.