


Series UCFC

Flanged bearing support for plain shafts d 25-30-35 mm

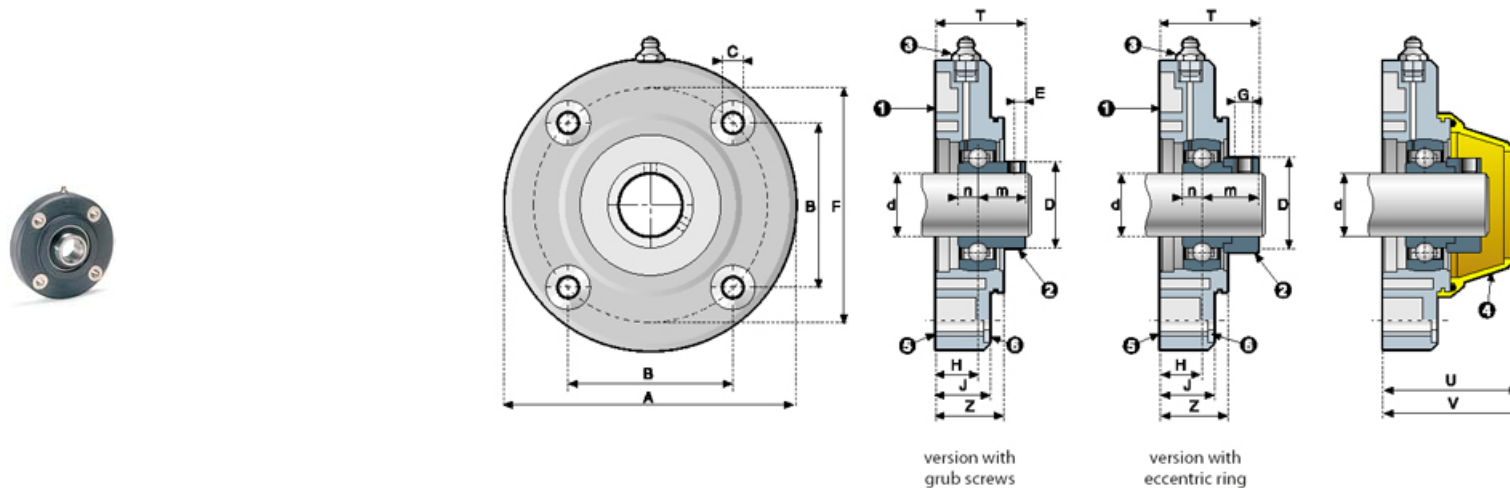

COMPONENTS

- 1 Housing in plastic material.
- 2 Adjustable ball bearing, pre-lubricated by means of grease-nipple or a quick coupler.
- 3 Ball-type grease-nipple (available upon request) quick coupler to take semi-rigid hoses $\varnothing$ 4 mm in Rilsan ([see accessories](#)).
- 4 Clip-on safety cap (accessory). Open version achievable by pressing in the shaft against the internal side of the cap.
- 5 Spacers to reinforce bolt holes.
- 6 Washer UNI 6592.



accessory

Ø d mm	CODE VERSION (PA)	SAFETY CAP CODE		DIMENSIONS (mm)															BEARING LOAD RATINGS		MAX RADIAL LOAD CAPACITY ON PLASTIC HOUSING PA (N)	WEIGHT (Kg)
		Closed	Open	A	B	C	D	E	F	G	H	J	Z	T	m	n	U	V	DYNAMIC C (N)	STATIC Co (N)		

SHAFT LOCKING WITH GRUB SCREWS																						
25	50205C	50009	50009.APE	122	70	8.5	34	5.4	99	M6x0.75	10.5	22.6	22.6	30	19.5	7.5	45.6	47.6	10800	7800	9500	0.45
30	50206CA	50010	50010.APE	122	70	8.5	40	5.9	99	M6x0.75	11.5	22.6	22.6	33.5	22	8	49.6	51.6	15000	11300	9300	0.50
30	50206C	50004	50004.APE	137	78	11	40	5.9	110	M6x0.75	20	25	32	42	22	8	63	65	15000	11300	13000	0.70
35	50207C	50004	50004.APE	137	78	11	46.7	7.4	110	M6x0.75	19	25	32	44.5	25.5	9.5	63	65	19700	15300	12800	0.80

SHAFT LOCKING WITH ECCENTRIC RING																						
25	50205CB	50009	50009.APE	122	70	8.5	38	5	99	M6x0.75	10.5	22.6	22.6	34.1	23.6	7.5	45.6	47.6	10800	7800	9500	0.50
30	50206CAB	50010	50010.APE	122	70	8.5	44.5	6.2	99	M8x1.00	11.5	22.6	22.6	38.4	26.9	9	49.6	51.6	15000	11300	9300	0.55
30	50206CB	50004	50004.APE	137	78	11	44.5	6.2	110	M8x1.00	20	25	32	46.9	26.9	9	63	65	15000	11300	13000	0.75
35	50207CB	50004	50004.APE	137	78	11	55.6	7	110	M10x1.25	19	25	32	48.6	29.6	9.5	63	65	19700	15300	12800	0.87

Ø d mm	CODE VERSION		SAFETY CAP CODE		DIMENSIONS (mm)															BEARING LOAD RATINGS		MAX RADIAL LOAD CAPACITY ON PLASTIC HOUSING		WEIGHT (Kg)
	PA	PP	Closed	Open	A	B	C	D	E	F	G	H	J	Z	T	m	n	U	V	DYNAMIC C (N)	STATIC Co (N)	PA (N)	PP (N)	

STAINLESS STEEL BEARING (with grub screws)																								
25	50205C/SS	60205C	50009	50009.APE	122	70	8.5	34	5.4	99	M6x0.75	10.5	22.6	22.6	30.3	19.8	7.6	45.6	47.6	8100	5800	9500	4000	0.45
30	50206CA/SS	60206CA	50010	50010.APE	122	70	8.5	40	5.9	99	M6x0.75	11.5	22.6	22.6	33.7	22.2	9	49.6	51.6	11250	8400	9300	4000	0.50
30	50206C/SS	60206C	50004	50004.APE	137	78	11	40	5.9	110	M6x0.75	20	25	32	42.2	22.2	9	63	65	11250	8400	13000	6000	0.70
35	50207C/SS	60207C	50004	50004.APE	137	78	11	46.7	7.4	110	M6x0.75	19	25	32	44.4	25.4	9.6	63	65	14750	11400	12800	6000	0.80

The dimension of the housings related to codes printed in bold letters are unified according to international standards.

COLOUR

- Bearing support in black.
- Safety cap in yellow.

- For sufficient quantities parts can be produced in different colours.