
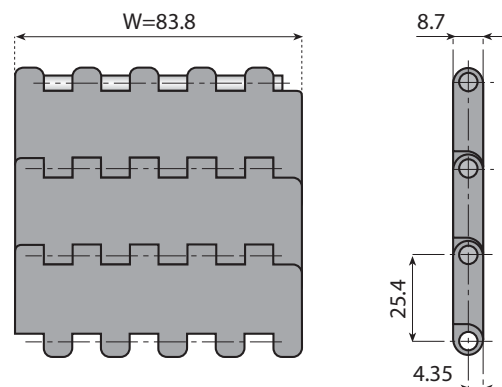


2250 K330

FLAT TOP BELTS ONE TRACK

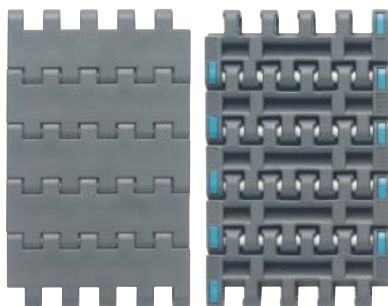

Version standard

Pin material: PBT (white)

Standard materials

LFG	NGG
Low Friction Acetal Resin	New Generation

On request and for adequate quantities
these chains can be produced in:

XPG	PP	AS
Extra Performance	Polypropylene	Anti-static Acetal Resin



Pages
4⇒7



Pages
312⇒314





Pages
333⇒337

Belts - Ref.	Code	Material	Width W		Pitch P		Backflex radius mm	Max load capacity N/m	Weight Kg/m ²
			mm	inch	mm	inch			
LFG 2250 K330 FT	25000	LFG Dark Grey	83.8	3.30	25.4	1.00	25	25.000	6.40
NGG 2250 K330 FT	25000NGG	NGG Light Grey							

2250 K330 FTP2

FLAT TOP BELTS ONE TRACK

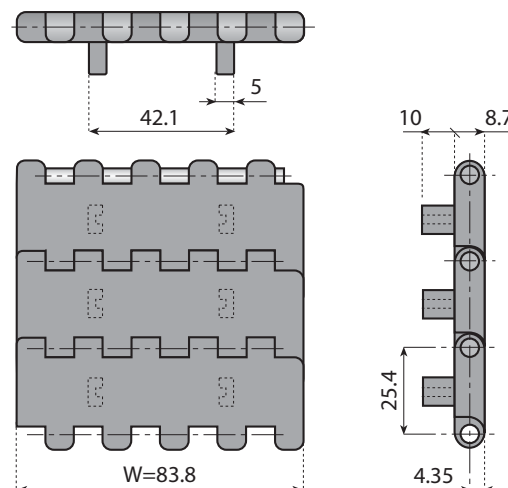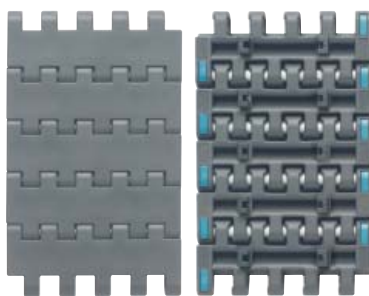

Version with two positioners

Pin material: PBT (white)

Standard materials

LFG	NGG
Low Friction Acetal Resin	New Generation

On request and for adequate quantities
these chains can be produced in:

XPG	PP	AS
Extra Performance	Polypropylene	Anti-static Acetal Resin



Pages
4⇒7



Pages
312⇒314



Pages
333⇒337

Belts - Ref.	Code	Material	Width W		Pitch P		Backflex radius mm	Max load capacity N/m	Weight Kg/m ²
			mm	inch	mm	inch			
LFG 2250 K330 FTP2	25001	LFG Dark Grey	83.8	3.30	25.4	1.00	25	25.000	6.40
NGG 2250 K330 FTP2	25001NGG	NGG Light Grey							

Standard length: 120 pitches (10 ft. - 3.048 m)