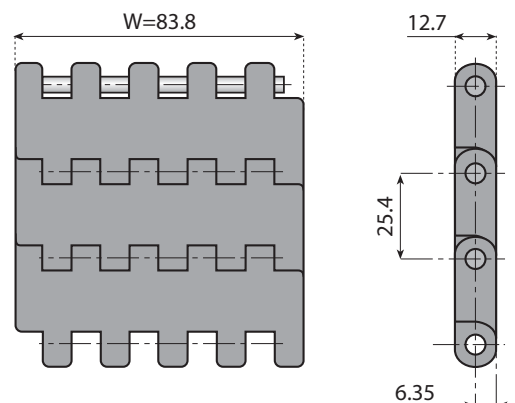
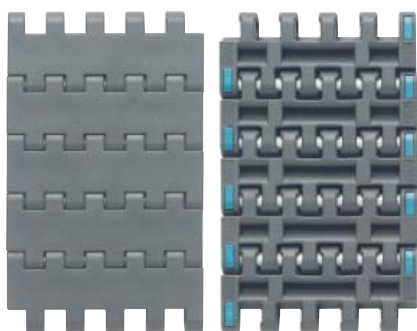


**Version standard****Pin material:** PBT (white)**Standard materials**



LFG	NGG
Low Friction Acetal Resin	New Generation

On request and for adequate quantities
these chains can be produced in:

XPG	PP	AS
Extra Performance	Polypropylene	Anti-static Acetal Resin

Pages
4⇒7Pages
315⇒317Pages
333⇒337

Belts - Ref.	Code	Material	Width W		Pitch P		Backflex radius mm	Max load capacity N/m	Weight Kg/m ²
			mm	inch	mm	inch			
LFG 2251 K330 FT	25020	LFG Dark Grey	83.8	3.30	25.4	1.00	25	38.000	14.00
NGG 2251 K330 FT	25020NGG	NGG Light Grey							

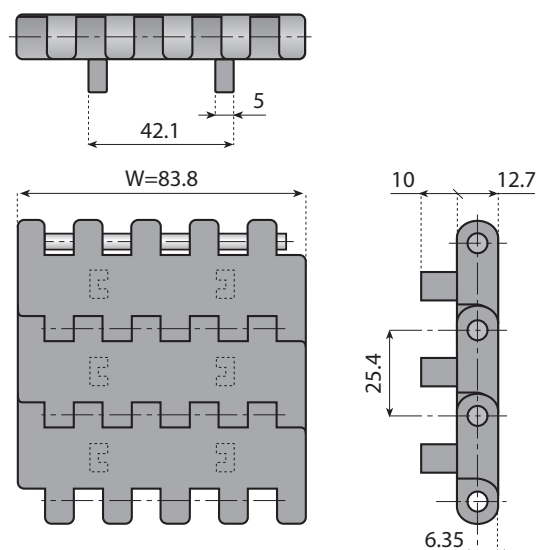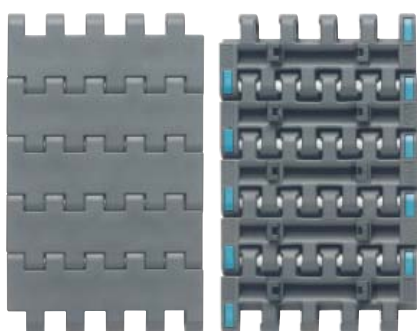**Version with two positioners****Pin material:** PBT (white)**Standard materials**

LFG	NGG
Low Friction Acetal Resin	New Generation

On request and for adequate quantities
these chains can be produced in:

XPG	PP	AS
Extra Performance	Polypropylene	Anti-static Acetal Resin

Pages
4⇒7Pages
315⇒317Pages
333⇒337

Belts - Ref.	Code	Material	Width W		Pitch P		Backflex radius mm	Max load capacity N/m	Weight Kg/m ²
			mm	inch	mm	inch			
LFG 2251 K330 FTP2	25021	LFG Dark Grey	83.8	3.30	25.4	1.00	25	38.000	14.10
NGG 2251 K330 FTP2	25021NGG	NGG Light Grey							

Standard length: 120 pitches (10 ft. - 3.048 m)