


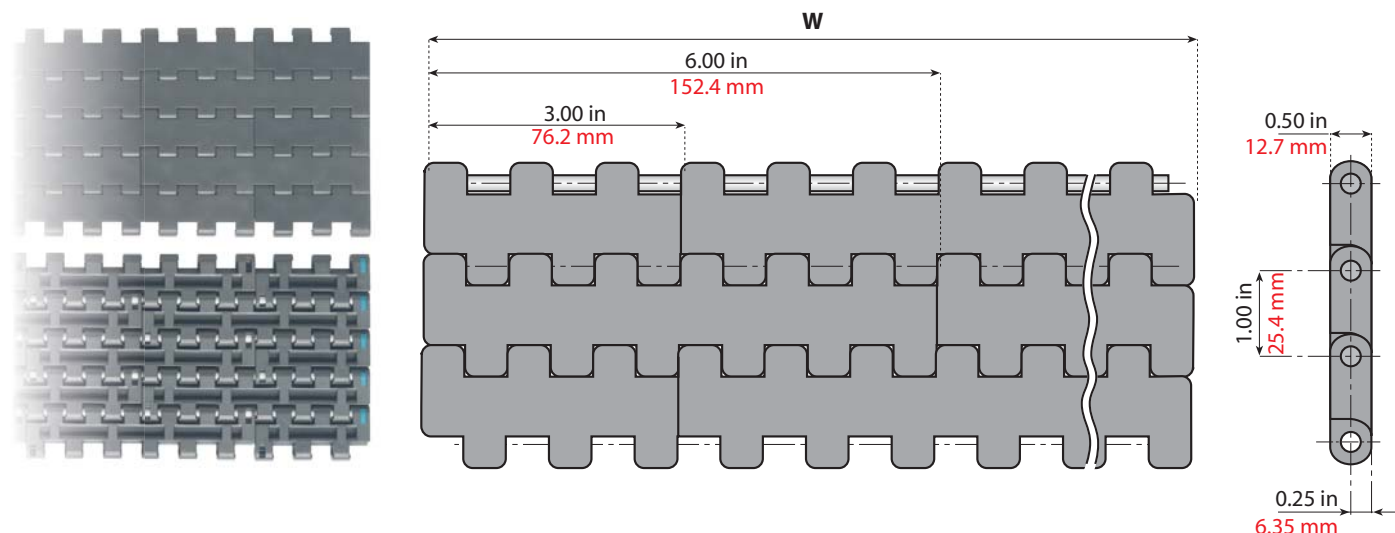

Version standard

Backflex radius: 1 inch, 25.4 mm

Max load capacity: 2604 lbs/ft, 38.000 N/m

Weight: 2.87 lbs/ft², 14.0 Kg/m²

Standard length: 120 pitches
(10 ft - 3.048 m)

Pin material: PBT (white)

Standard materials

LFG	NGG
Low Friction Acetal Resin	New Generation

On request and for adequate quantities
these chains can be produced in:

XPG	PP	AS
Extra Performance	Polypropylene	Anti-static Acetal Resin



Pages
4⇒7



Pages
315⇒317



Pages
333⇒337

FOR BELTS AVAILABLE IN "NGG" MATERIAL JUST ADD "NGG" TO PART NUMBER (EXAMPLE "CODE 26003-NGG")

Width W		Belts Ref.	Code	Width W		Belts Ref.	Code	Width W		Belts Ref.	Code	Width W		Belts Ref.	Code
inch	mm			inch	mm			inch	mm			inch	mm		
3.00	76	2252-0003 FT	26000	33.00	838	2252-0033 FT	261010	63.00	1600	2252-0063 FT	261020	93.00	2362	2252-0093 FT	261030
6.00	152	2252-0006 FT	26003	36.00	914	2252-0036 FT	261011	66.00	1676	2252-0066 FT	261021	96.00	2438	2252-0096 FT	261031
9.00	229	2252-0009 FT	261002	39.00	991	2252-0039 FT	261012	69.00	1753	2252-0069 FT	261022	99.00	2515	2252-0099 FT	261032
12.00	305	2252-0012 FT	261003	42.00	1067	2252-0042 FT	261013	72.00	1829	2252-0072 FT	261023	102.00	2591	2252-0102 FT	261033
15.00	381	2252-0015 FT	261004	45.00	1143	2252-0045 FT	261014	75.00	1905	2252-0075 FT	261024	105.00	2667	2252-0105 FT	261034
18.00	457	2252-0018 FT	261005	48.00	1219	2252-0048 FT	261015	78.00	1981	2252-0078 FT	261025	108.00	2743	2252-0108 FT	261035
21.00	533	2252-0021 FT	261006	51.00	1295	2252-0051 FT	261016	81.00	2057	2252-0081 FT	261026	111.00	2819	2252-0111 FT	261036
24.00	610	2252-0024 FT	261007	54.00	1372	2252-0054 FT	261017	84.00	2134	2252-0084 FT	261027	114.00	2896	2252-0114 FT	261037
27.00	686	2252-0027 FT	261008	57.00	1448	2252-0057 FT	261018	87.00	2210	2252-0087 FT	261028	117.00	2972	2252-0117 FT	261038
30.00	762	2252-0030 FT	261009	60.00	1524	2252-0060 FT	261019	90.00	2286	2252-0090 FT	261029	120.00	3048	2252-0120 FT	261039

Other widths available on request.