
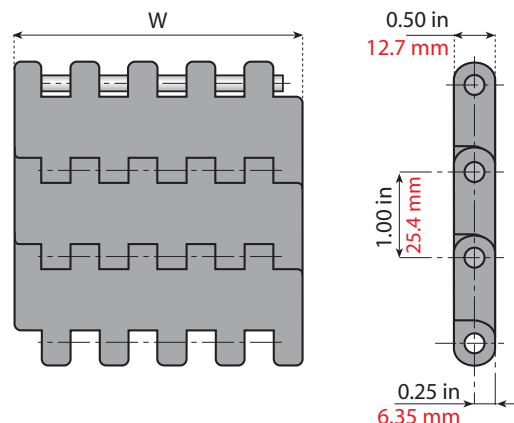


2252 FT

FLAT TOP AMERICAN STANDARD BELTS ONE TRACK DEDICATED WIDTHS (Pitch 1" - 25.4 mm)

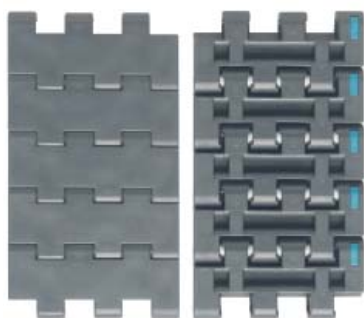

Dedicated widths

Pin material: PBT (white)

Standard materials

LFG	NGG
Low Friction Acetal Resin	New Generation

On request and for adequate quantities
these chains can be produced in:

XPG	PP	AS
Extra Performance	Polypropylene	Anti-static Acetal Resin



Pages
4⇒7



Pages
315⇒317





Pages
333⇒337

Belts - Ref.	Code	Material	Width W		Pitch P		Backflex radius mm		Max load capacity		Weight	
			mm	inch	mm	inch	mm	inch	N/m	lbs/ft	Kg/m ²	lbs/ft ²
LFG 2252 K300 FT	26000	LFG Dark Grey	76.2	3.00	25.4	1.00	25.4	1.00	38.000	2604	14.0	2.87
LFG 2252 K325 FT	26001		82.6	3.25								
LFG 2252 K450 FT	26002		114.3	4.50								
LFG 2252 K600 FT	26003		152.4	6.00								
LFG 2252 K750 FT	26004		190.5	7.50								

2252 FTP2

FLAT TOP AMERICAN STANDARD BELTS ONE TRACK DEDICATED WIDTHS (Pitch 1" - 25.4 mm)

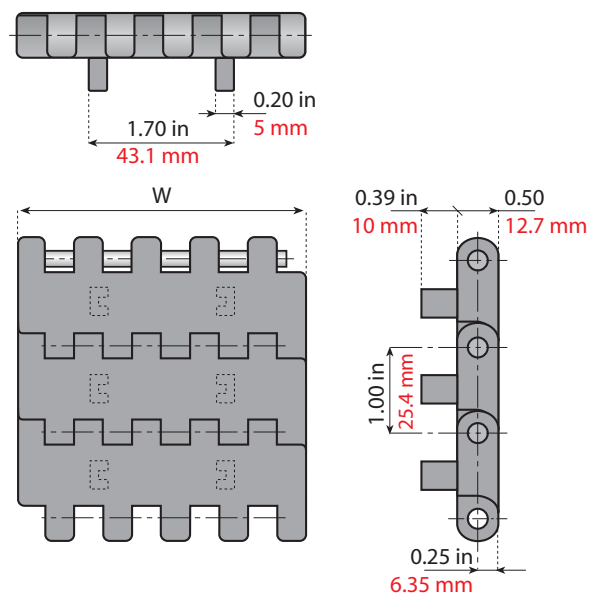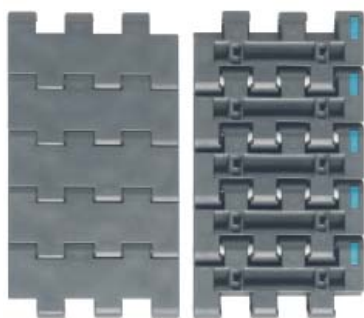

Version with two positioners

Pin material: PBT (white)

Standard materials

LFG	NGG
Low Friction Acetal Resin	New Generation

On request and for adequate quantities
these chains can be produced in:

XPG	PP	AS
Extra Performance	Polypropylene	Anti-static Acetal Resin



Pages
4⇒7



Pages
315⇒317



Pages
333⇒337

Belts - Ref.	Code	Material	Width W		Pitch P		Backflex radius mm		Max load capacity		Weight	
			mm	inch	mm	inch	mm	inch	N/m	lbs/ft	Kg/m ²	lbs/ft ²
LFG 2252 K300 FTP2	26010	LFG Dark Grey	76.2	3.00	25.4	1.00	25.4	1.00	38.000	2604	14.1	2.89
LFG 2252 K325 FTP2	26011		82.6	3.25								
LFG 2252 K450 FTP2	26012		114.3	4.50								
LFG 2252 K600 FTP2	26013		152.4	6.00								
LFG 2252 K750 FTP2	26014		190.5	7.50								

Standard length: 120 pitches (10 ft. - 3.048 m)