


Series UCFA

Flanged bearing with solid housings for plain shafts d 20-25-30 mm

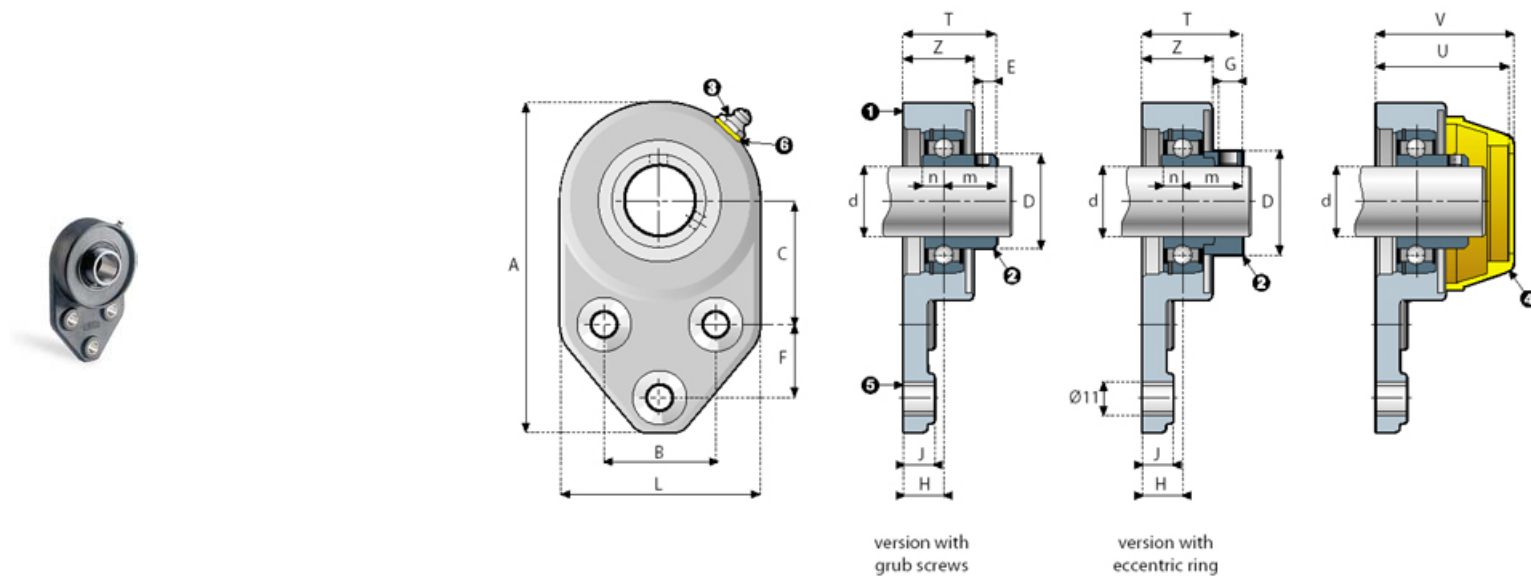

COMPONENTS

- 1 Housing in plastic material.
- 2 Adjustable ball bearing, pre-lubricated, lubricated by means of grease-nipple or a quick coupler.
- 3 Ball-type grease-nipple.
- 4 Clip-on safety cap (accessory). Open version achievable by pressing in the shaft against the internal side of the cap.
- 5 Spacers to reinforce bolt holes.
- 6 Washer for grease - nipple.

 accessory

Ø d mm	CODE VERSION (PA)	SAFETY CAP CODE		DIMENSIONS (mm)																BEARING LOAD RATINGS		MAX RADIAL LOAD CAPACITY ON PLASTIC HOUSING PA (N)	WEIGHT (Kg)
		Closed	Open	A	B	C	D	E	F	G	H	L	Z	J	T	m	n	U	V	DYNAMIC C (N)	STATIC Co (N)		

SHAFT LOCKING WITH GRUB SCREWS																							
20	52205FA	50013	50013.APE	125	41.3	46	28.5	5.4	28.6	M6x0.75	17	69	27.5	12.5	35.2	18.2	7	49.5	51.5	9500	6580	9500	0.30
25	52205F	50009	50009.APE	125	41.3	46	34	5.4	28.6	M6x0.75	16	69	27.5	12.5	35.5	19.5	7.5	52.5	54.5	10800	7800	9000	0.35
25	52206FA	50010	50010.APE	140.5	47.6	52.4	34	5.4	31.7	M6x0.75	18	84	29.5	12.5	37.5	19.5	7.5	56.5	58.5	10800	7800	10000	0.40
30	52206F	50010	50010.APE	140.5	47.6	52.4	40	5.9	31.7	M6x0.75	17	84	29.5	12.5	39	22	8	56.5	58.5	15000	11300	10000	0.45

SHAFT LOCKING WITH ECCENTRIC RING																							
20	52205FBA	50013	50013.APE	125	41.3	46	33.3	5	28.6	M6x0.75	17	69	27.5	12.5	40.6	23.6	7.5	49.5	51.5	9500	6580	9500	0.35
25	52205FB	50009	50009.APE	125	41.3	46	38	5	28.6	M6x0.75	16	69	27.5	12.5	39.6	23.6	7.5	52.5	54.5	10800	7800	9000	0.40
25	52206FBA	50010	50010.APE	140.5	47.6	52.4	38	5	31.7	M6x0.75	18	84	29.5	12.5	41.6	23.6	7.5	56.5	58.5	10800	7800	10000	0.45
30	52206FB	50010	50010.APE	140.5	47.6	52.4	44.5	6.2	31.7	M8x1.00	17	84	29.5	12.5	43.9	26.9	9	56.5	58.5	15000	11300	10000	0.50

STAINLESS STEEL BEARING (with grub screws)																							
20	52205FA/SS	50013	50013.APE	125	41.3	46	28.5	5.4	28.6	M6x0.75	17	69	27.5	12.5	35.2	18.2	7.6	49.5	51.5	9500	6580	9500	0.30
25	52205F/SS	50009	50009.APE	125	41.3	46	34	5.4	28.6	M6x0.75	16	69	27.5	12.5	35.8	19.8	7.6	52.5	54.5	8100	5800	9000	0.35
25	52206FA/SS	50010	50010.APE	140.5	47.6	52.4	34	5.4	31.7	M6x0.75	18	84	29.5	12.5	37.8	19.8	7.6	56.5	58.5	8100	5800	10000	0.40
30	52206F/SS	50010	50010.APE	140.5	47.6	52.4	40	5.9	31.7	M6x0.75	17	84	29.5	12.5	39.2	22.2	9	56.5	58.5	11250	8400	10000	0.45

The dimension of the housings related to codes printed in bold letters are unified according to international standards.

COLOUR

- Bearing support in black.
- Safety cap in yellow.
- For sufficient quantities parts can be produced in different colours.