


Series **UCFG**

Flanged bearing with solid housings for plain shafts d 25-30-35 mm

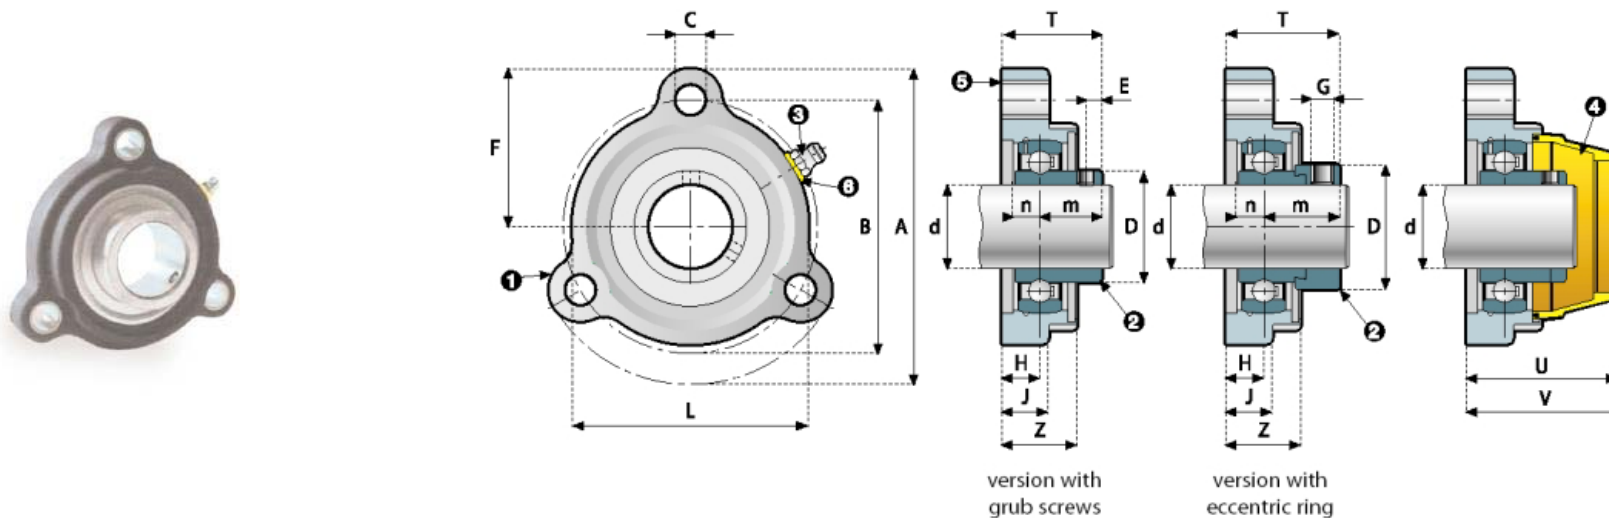

COMPONENTS

- 1 Housing in plastic material.
- 2 Adjustable ball bearing, pre-lubricated, lubricated by means of grease-nipple or a quick coupler.
- 3 Ball-type grease-nipple.
- 4 Clip-on safety cap (accessory). Open version achievable by pressing in the shaft against the internal side of the cap.
- 5 Spacers to reinforce bolt holes.
- 6 Washer for grease - nipple.

 accessory

Ø d mm	CODE VERSION (PA)	SAFETY CAP CODE		DIMENSIONS (mm)																BEARING LOAD RATINGS		MAX RADIAL LOAD CAPACITY ON PLASTIC HOUSING PA (N)	WEIGHT (Kg)
		Closed	Open	A	B	C	D	E	F	G	H	L	J	Z	T	m	n	U	V	DYNAMIC C (N)	STATIC Co (N)		

SHAFT LOCKING WITH GRUB SCREWS																							
25	52205G	50009	50009. APE	95.5	76.2	8.5	34	5.4	47.7	M6x0.75	13.5	71	16.5	25	33	19.5	7.5	48	50	10800	7800	5000	0.25
30	52206G	50027	50027. APE	113	91	11	40	5.9	56.5	M6x0.75	13.5	84.1	16.5	27	35.5	22	8	54	56	15000	11300	6000	0.30
35	52207G	50010	50010. APE	126.5	101.5	11	46.7	7.4	63.3	M6x0.75	18	93.7	16.5	33	43.5	25.5	9.5	60	62	19700	15300	8000	0.35

SHAFT LOCKING WITH ECCENTRIC RING																							
25	52205GB	50009	50009. APE	95.5	76.2	8.5	38	5	47.7	M6x0.75	13.5	71	16.5	25	37.1	23.6	7.5	48	50	10800	7800	5000	0.30
30	52206GB	50027	50027. APE	113	91	11	44.5	6.2	56.5	M8x1.00	13.5	84.1	16.5	27	40.4	26.9	9	54	56	15000	11300	6000	0.35
35	52207GB	50010	50010. APE	126.5	101.5	11	55.6	7	63.3	M10x1.25	18	93.7	16.5	33	47.6	29.6	9.5	60	62	19700	15300	8000	0.40

STAINLESS STEEL BEARING (with grub screws)																							
25	52205G/SS	50009	50009. APE	95.5	76.2	8.5	34	5.4	47.7	M6x0.75	13.5	71	16.5	25	33.3	19.8	7.6	48	50	8100	5800	5000	0.25
30	52206G/SS	50027	50027. APE	113	91	11	40	5.9	56.5	M6x0.75	13.5	84.1	16.5	27	35.7	22.2	9	54	56	11250	8400	6000	0.30
35	52207G/SS	50010	50010. APE	126.5	101.5	11	46.7	7.4	63.3	M6x0.75	18	93.7	16.5	33	43.4	25.4	9.6	60	62	14700	11400	8000	0.35

The dimension of the housings related to codes printed in bold letters are unified according to international standards.

COLOUR

- Bearing support in black.
- Safety cap in yellow.
- For sufficient quantities parts can be produced in different colours.