


Series **SFL**

Flanged bearing support for plain shafts d 12-15-16-17-20 mm

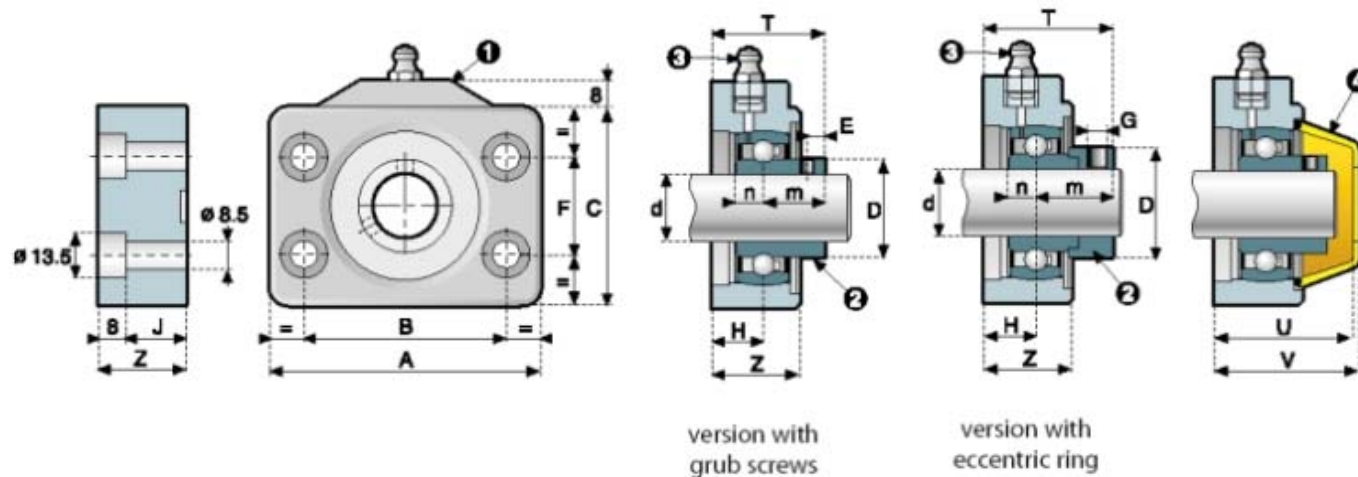

COMPONENTS

- 1 Housing in plastic material.
- 2 Adjustable ball bearing, pre-lubricated by means of grease-nipple or a quick coupler.
- 3 Ball-type grease-nipple.
- 4 Clip-on safety cap (accessory). Open version achievable by pressing in the shaft against the internal side of the cap.

Ø d mm	CODE VERSION (PA)	SAFETY CAP CODE		DIMENSIONS (mm)														BEARING LOAD RATINGS		MAX RADIAL LOAD CAPACITY ON PLASTIC HOUSING PA (N)	WEIGHT (Kg)
		Closed	Open	A	B	C	D	E	F	G	H	J	Z	T	m	n	U	V	DYNAMIC C (N)		

SHAFT LOCKING WITH GRUB SCREWS																						
12	54201S	50012	50013. APE	80	60	60	24.2	5.3	30	M6x0.75	9	10.5	18.5	25	16	6	33.5	35.5	7300	4760	6500	0.25
15	54202S	50012	50013. APE	80	60	60	24.2	5.3	30	M6x0.75	9	10.5	18.5	25	16	6	33.5	35.5	7300	4760	6500	0.25
16	54016S	50012	50013. APE	80	60	60	24.2	5.3	30	M6x0.75	9	10.5	18.5	25	16	6	33.5	35.5	7300	4760	6500	0.25
17	54203S	50012	50013. APE	80	60	60	24.2	5.3	30	M6x0.75	9	10.5	18.5	25	16	6	33.5	35.5	7300	4760	6500	0.25
20	54204S	50012	50013. APE	80	60	60	28.5	5.4	30	M6x0.75	15	18	26	33.2	18.2	7	41	43	9850	6580	6200	0.30

SHAFT LOCKING WITH ECCENTRIC RING																						
12	54201SB	50012	50013. APE	80	60	60	28.5	5	30	M6x0.75	9	10.5	18.5	31	22	6	33.5	35.5	7300	4760	6500	0.28
15	54202SB	50012	50013. APE	80	60	60	28.5	5	30	M6x0.75	9	10.5	18.5	31	22	6	33.5	35.5	7300	4760	6500	0.28
16	54016SB	50012	50013. APE	80	60	60	28.5	5	30	M6x0.75	9	10.5	18.5	31	22	6	33.5	35.5	7300	4760	6500	0.28
17	54203SB	50012	50013. APE	80	60	60	28.5	5	30	M6x0.75	9	10.5	18.5	31	22	6	33.5	35.5	7300	4760	6500	0.28
20	54204SB	50012	50013. APE	80	60	60	33.3	5	30	M6x0.75	15	18	26	38.6	23.6	7.5	41	43	9850	6580	6200	0.35

Ø d mm	CODE VERSION		SAFETY CAP CODE		DIMENSIONS (mm)																BEARING LOAD RATINGS		MAX RADIAL LOAD CAPACITY ON PLASTIC HOUSING (N)		WEIGHT (Kg)
	PA	PP	Closed	Open	A	B	C	D	E	F	G	H	J	Z	T	m	n	U	V	DYNAMIC C (N)	STATIC Co (N)	PA (N)	PP (N)		

STAINLESS STEEL BEARING (with grub screws)																								
20	54204S/SS	64204S/SS	50012	50013.APE	80	60	60	28.5	5.4	30	M6x0.75	15	18	26	33.2	18.2	7.6	41	43	7300	4900	6200	3000	0.30

COLOUR

- Bearing support in black.
- Safety cap in yellow.
- For sufficient quantities parts can be produced in different colours.

