



Series **SQL** right-left


Flanged bearing with solid housings for plain shafts d 12-15-16-17-20 mm



right




left

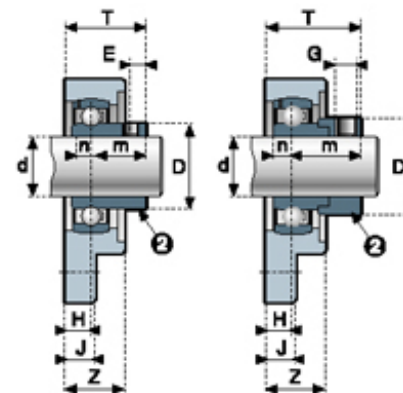

version with
grub screws

version with
eccentric ring



COMPONENTS

- 1 Housing in plastic material.
- 2 Adjustable ball bearing, pre-lubricated, lubricated by means of grease-nipple or a quick coupler.
- 3 Ball-type grease-nipple.
- 4 Clip-on safety cap (accessory). Open version achievable by pressing in the shaft against the internal side of the cap.

 accessory

Ø d mm	CODE VERSION (PA)		SAFETY CAP CODE		DIMENSIONS (mm)														BEARING LOAD RATINGS		MAX RADIAL LOAD CAPACITY ON PLASTIC HOUSING PA (N)	WEIGHT (Kg)
	GREY	BLACK	Closed	Open	A	B	C	D	E	F	G	H	J	Z	T	m	n	U	V	DYNAMIC C (N)	STATIC Co (N)	

SHAFT LOCKING WITH GRUB SCREWS - RIGHT VERSION																							
12	54201GD	54201ND	50012	50013.APE	75	75.5	14	24.2	5.3	46.5	M6x0.75	10.5	10	20	26.5	16	6	35	37	7300	4760	6000	0.20
15	54202GD	54202ND	50012	50013.APE	75	75.5	14	24.2	5.3	46.5	M6x0.75	10.5	10	20	26.5	16	6	35	37	7300	4760	6000	0.20
16	54016GD	54016ND	50012	50013.APE	75	75.5	14	24.2	5.3	46.5	M6x0.75	10.5	10	20	26.5	16	6	35	37	7300	4760	6000	0.20
17	54203GD	54203ND	50012	50013.APE	75	75.5	14	24.2	5.3	46.5	M6x0.75	10.5	10	20	26.5	16	6	35	37	7300	4760	6000	0.20
20	54204GD	54204ND	50012	50013.APE	75	75.5	14	28.5	5.4	46.5	M6x0.75	9	10	20	27.2	18.2	7	35	37	9850	6580	5700	0.25

SHAFT LOCKING WITH ECCENTRIC RING - RIGHT VERSION																							
12	54201GDB	54201NDB	50012	50013.APE	75	75.5	14	28.5	5	46.5	M6x0.75	10.5	10	20	32.5	22	6	35	37	7300	4760	6000	0.23
15	54202GDB	54202NDB	50012	50013.APE	75	75.5	14	28.5	5	46.5	M6x0.75	10.5	10	20	32.5	22	6	35	37	7300	4760	6000	0.23
16	54016GDB	54016NDB	50012	50013.APE	75	75.5	14	28.5	5	46.5	M6x0.75	10.5	10	20	32.5	22	6	35	37	7300	4760	6000	0.23
17	54203GDB	54203NDB	50012	50013.APE	75	75.5	14	28.5	5	46.5	M6x0.75	10.5	10	20	32.5	22	6	35	37	7300	4760	6000	0.23
20	54204GDB	54204NDB	50012	50013.APE	75	75.5	14	33.3	5	46.5	M6x0.75	9	10	20	32.6	23.6	7.5	35	37	9850	6580	5700	0.28

STAINLESS STEEL BEARING (with grub screws) - RIGHT VERSION																							
20	54204GD/SS	54204ND/SS	50012	50013.APE	75	75.5	14	28.5	5.4	46.5	M6x0.75	9	10	20	27.2	18.2	7.6	35	37	7300	4900	5700	0.25

Ø d mm	CODE VERSION (PA)		SAFETY CAP CODE		DIMENSIONS (mm)														BEARING LOAD RATINGS		MAX RADIAL LOAD CAPACITY ON PLASTIC HOUSING PA (N)	WEIGHT (Kg)
	GREY	BLACK	Closed	Open	A	B	C	D	E	F	G	H	J	Z	T	m	n	U	V	DYNAMIC C (N)	STATIC Co (N)	

SHAFT LOCKING WITH GRUB SCREWS - LEFT VERSION																							
12	54201GS	54201NS	50012	50013.APE	75	75.5	14	24.2	5.3	46.5	M6x0.75	10.5	10	20	26.5	16	6	35	37	7300	4760	6000	0.20
15	54202GS	54202NS	50012	50013.APE	75	75.5	14	24.2	5.3	46.5	M6x0.75	10.5	10	20	26.5	16	6	35	37	7300	4760	6000	0.20
16	54016GS	54016NS	50012	50013.APE	75	75.5	14	24.2	5.3	46.5	M6x0.75	10.5	10	20	26.5	16	6	35	37	7300	4760	6000	0.20
17	54203GS	54203NS	50012	50013.APE	75	75.5	14	24.2	5.3	46.5	M6x0.75	10.5	10	20	26.5	16	6	35	37	7300	4760	6000	0.20

20	54204GS	54204NS	50012	50013. APE	75	75.5	14	28.5	5.4	46.5	M6x0.75	9	10	20	27.2	18.2	7	35	37	9850	6580	5700	0.25
----	----------------	----------------	-----------------------	--------------------------------	----	------	----	------	-----	------	---------	---	----	----	------	------	---	----	----	------	------	------	------

SHAFT LOCKING WITH ECCENTRIC RING - LEFT VERSION

12	54201GSB	54201NSB	50012	50013. APE	75	75.5	14	28.5	5	46.5	M6x0.75	10.5	10	20	32.5	22	6	35	37	7300	4760	6000	0.23
15	54202GSB	54202NSB	50012	50013. APE	75	75.5	14	28.5	5	46.5	M6x0.75	10.5	10	20	32.5	22	6	35	37	7300	4760	6000	0.23
16	54016GSB	54016NSB	50012	50013. APE	75	75.5	14	28.5	5	46.5	M6x0.75	10.5	10	20	32.5	22	6	35	37	7300	4760	6000	0.23
17	54203GSB	54203NSB	50012	50013. APE	75	75.5	14	28.5	5	46.5	M6x0.75	10.5	10	20	32.5	22	6	35	37	7300	4760	6000	0.23
20	54204GSB	54204NSB	50012	50013. APE	75	75.5	14	33.3	5	46.5	M6x0.75	9	10	20	32.6	23.6	7.5	35	37	9850	6580	5700	0.28

STAINLESS STEEL BEARING (with grub screws) - LEFT VERSION

20	54204 GS/SS	54204 NS/SS	50012	50013. APE	75	75.5	14	28.5	5.4	46.5	M6x0.75	9	10	20	27.2	18.2	7.6	35	37	7300	4900	5700	0.25
----	------------------------	------------------------	-----------------------	--------------------------------	----	------	----	------	-----	------	---------	---	----	----	------	------	-----	----	----	------	------	------	------

The dimension of the housings related to codes printed in bold letters are unified according to international standards.

COLOUR

- Bearing support in grey or black.
- Safety cap in yellow.
- For sufficient quantities parts can be produced in different colours.