

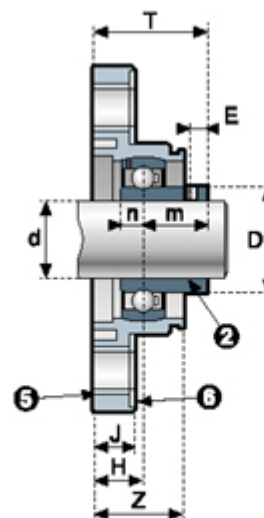


Series UFL


Flanged bearing support for plain shafts d 12-15-16-17-20 mm

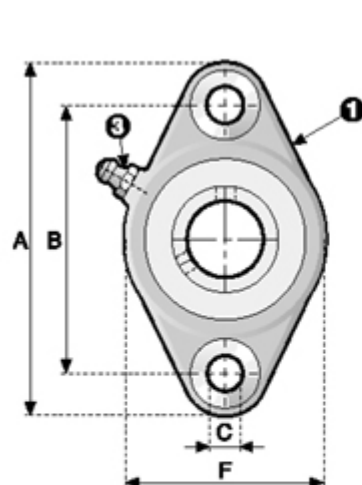

version with
grub screws

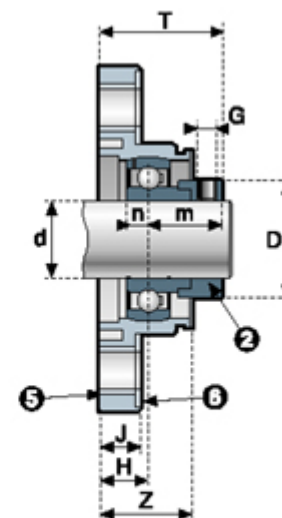

version with
eccentric ring

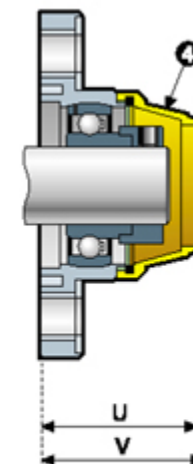

COMPONENTS

- 1 Housing in plastic material.
- 2 Adjustable ball bearing, pre-lubricated by means of grease-nipple or a quick coupler.
- 3 Ball-type grease-nipple.
- 4 Clip-on safety cap (accessory). Open version achievable by pressing in the shaft against the internal side of the cap.
- 5 Spacers to reinforce bolt holes.
- 6 Washer UNI 6592.



accessory

Ø d mm	CODE VERSION (PA)	SAFETY CAP CODE		DIMENSIONS (mm)															BEARING LOAD RATINGS		MAX RADIAL LOAD CAPACITY ON PLASTIC HOUSING PA (N)		WEIGHT (Kg)
		Closed	Open	A	B	C	D	E	F	G	H	J	Z	T	m	n	U	V	DYNAMIC C (N)	STATIC Co (N)			

SHAFT LOCKING WITH GRUB SCREWS																						
12	54201	50008	50008.APE	100	76.5	11	24.2	5.3	56	M6x0.75	17.5	12	26	33.5	16	6	47	49	7300	4760	6500	0.25
15	54202	50008	50008.APE	100	76.5	11	24.2	5.3	56	M6x0.75	17.5	12	26	33.5	16	6	47	49	7300	4760	6500	0.25
16	54016	50008	50008.APE	100	76.5	11	24.2	5.3	56	M6x0.75	17.5	12	26	33.5	16	6	47	49	7300	4760	6500	0.25
17	54203	50008	50008.APE	100	76.5	11	24.2	5.3	56	M6x0.75	17.5	12	26	33.5	16	6	47	49	7300	4760	6500	0.25
20	54204	50008	50008.APE	100	76.5	11	28.5	5.4	56	M6x0.75	15.5	12	26	33.7	18.2	7	47	49	9850	6580	6200	0.30

SHAFT LOCKING WITH ECCENTRIC RING																						
12	54201B	50008	50008.APE	100	76.5	11	25.8	5	56	M6x0.75	17.5	12	26	39.5	22	6	47	49	7300	4760	6500	0.28
15	54202B	50008	50008.APE	100	76.5	11	28.5	5	56	M6x0.75	17.5	12	26	39.5	22	6	47	49	7300	4760	6500	0.28
16	54016B	50008	50008.APE	100	76.5	11	28.5	5	56	M6x0.75	17.5	12	26	39.5	22	6	47	49	7300	4760	6500	0.28
17	54203B	50008	50008.APE	100	76.5	11	28.5	5	56	M6x0.75	17.5	12	26	39.5	22	6	47	49	7300	4760	6500	0.28
20	54204B	50008	50008.APE	100	76.5	11	33.3	5	56	M6x0.75	15.5	12	26	39.1	23.6	7.5	47	49	9850	6580	6200	0.35

Ø d mm	CODE VERSION		SAFETY CAP CODE		DIMENSIONS (mm)															BEARING LOAD RATINGS		MAX RADIAL LOAD CAPACITY ON PLASTIC HOUSING		WEIGHT (Kg)
	PA	PP	Closed	Open	A	B	C	D	E	F	G	H	J	Z	T	m	n	U	V	DYNAMIC C (N)	STATIC Co (N)	PA (N)	PP (N)	

STAINLESS STEEL BEARING (with grub screws)																								
20	54204/SS	64204/SS	50008	50008.APE	100	76.5	11	28.5	5.4	56	M6x0.75	15.5	12	26	33.7	18.2	7.6	47	49	7300	4900	6200	3000	0.30

The dimension of the housings related to codes printed in bold letters are unified according to international standards.

COLOUR

- Bearing support in black.
- Safety cap in yellow.
- For sufficient quantities parts can be produced in different colours.