


Series UCFT

Flanged bearing support for plain shafts d 12-15-16-17-25 mm

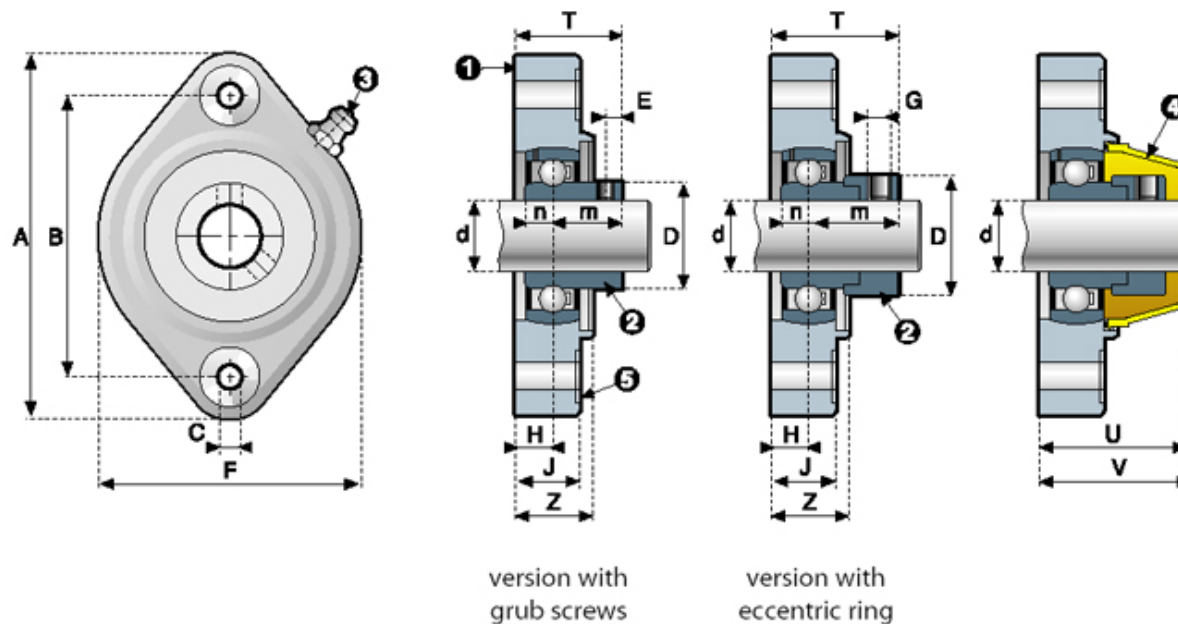

COMPONENTS

- 1 Housing in plastic material.
- 2 Adjustable ball bearing, pre-lubricated by means of grease-nipple or a quick coupler.
- 3 Ball-type grease-nipple.
- 4 Clip-on safety cap (accessory). Open version achievable by pressing in the shaft against the internal side of the cap.
- 5 Washer UNI 6592

 accessory

Ø d mm	CODE VERSION (PA)		SAFETY CAP CODE		DIMENSIONS (mm)														BEARING LOAD RATINGS		MAX RADIAL LOAD CAPACITY ON PLASTIC HOUSING PA (N)	WEIGHT (Kg)
	GREY	BLACK	Closed	Open	A	B	C	D	E	F	G	H	J	Z	T	m	n	U	V	DYNAMIC C (N)	STATIC Co (N)	

SHAFT LOCKING WITH GRUB SCREWS																							
12	54201TG	54201TN	50024	50024. APE	81	63.5	6.5	24.2	5.3	58.5	M6x0.75	8.5	16	19	24.5	16	6	33	35	7300	4760	6500	0.20
15	54202TG	54202TN	50024	50024. APE	81	63.5	6.5	24.2	5.3	58.5	M6x0.75	8.5	16	19	24.5	16	6	33	35	7300	4760	6500	0.20
16	54016TG	54016TN	50024	50024. APE	81	63.5	6.5	24.2	5.3	58.5	M6x0.75	8.5	16	19	24.5	16	6	33	35	7300	4760	6500	0.20
17	54203TG	54203TN	50024	50024. APE	81	63.5	6.5	24.2	5.3	58.5	M6x0.75	8.5	16	19	24.5	16	6	33	35	7300	4760	6500	0.20
25	54205TG	54205TN	50009	50009. APE	96	76	8.5	34	5.4	71	M6x0.75	10.5	18.5	21.5	30	19.5	7.5	44.5	46.5	10800	7800	10000	0.32

SHAFT LOCKING WITH ECCENTRIC RING																							
12	54201TGB	54201TNB	50024	50024. APE	81	63.5	6.5	28.5	5	58.5	M6x0.75	8.5	16	19	30.5	22	6	33	35	7300	4760	6500	0.23
15	54202TGB	54202TNB	50024	50024. APE	81	63.5	6.5	28.5	5	58.5	M6x0.75	8.5	16	19	30.5	22	6	33	35	7300	4760	6500	0.23
16	54016TGB	54016TNB	50024	50024. APE	81	63.5	6.5	28.5	5	58.5	M6x0.75	8.5	16	19	30.5	22	6	33	35	7300	4760	6500	0.23
17	54203TGB	54203TNB	50024	50024. APE	81	63.5	6.5	28.5	5	58.5	M6x0.75	8.5	16	19	30.5	22	6	33	35	7300	4760	6500	0.23
25	54205TGB	54205TNB	50009	50009. APE	96	76	8.5	38.1	5	71	M6x0.75	10.5	18.5	21.5	34.1	23.6	7.5	44.5	46.5	10800	7800	10000	0.35

STAINLESS STEEL BEARING (with grub screws)																							
25	54205TG/SS	54205TN/SS	50009	50009. APE	96	76	8.5	34	5.4	71	M6x0.75	10.5	18.5	21.5	30.3	19.8	7.6	44.5	46.5	8100	5800	10000	0.32

The dimension of the housings related to codes printed in bold letters are unified according to international standards.

COLOUR

- Bearing support in grey or black.
- Safety cap in yellow.
- For sufficient quantities parts can be produced in different colours.