


Series UCT

Take-up support for plain shafts d 20-25-30-35 mm

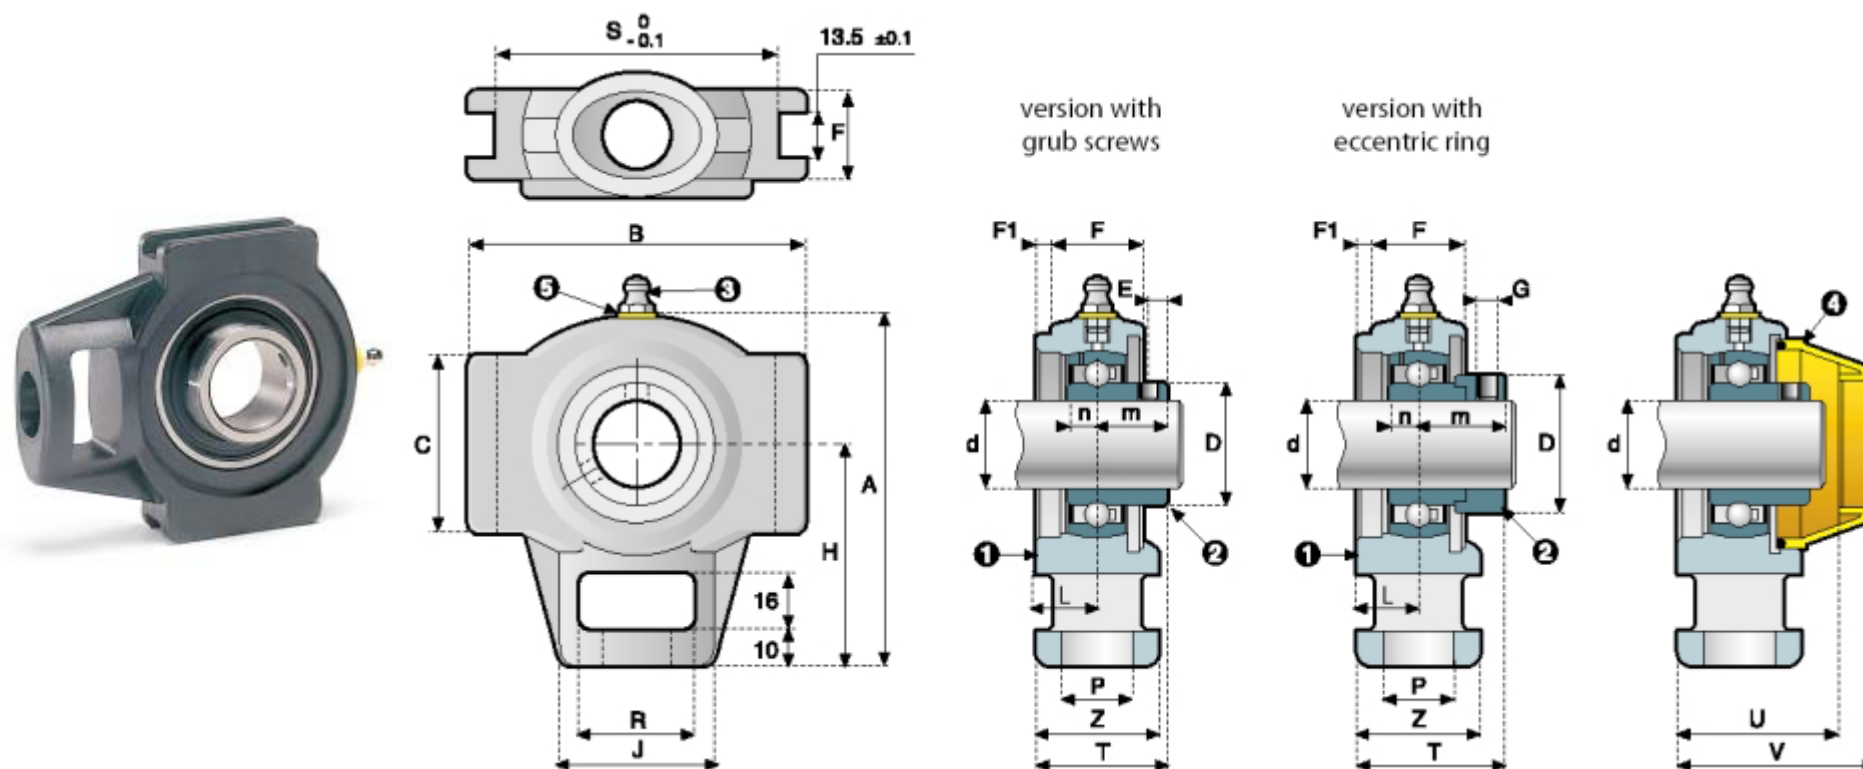

COMPONENTS

- 1 Housing in plastic material.
- 2 Adjustable ball bearing, pre-lubricated by means of grease-nipple or a quick coupler.
- 3 Ball-type grease-nipple.
- 4 Clip-on safety cap (accessory). Open version achievable by pressing in the shaft against the internal side of the cap.
- 5 Washer for grease-nipple.



accessory

Ø d mm	CODE VERSION (PA)	SAFETY CAP CODE		DIMENSIONS (mm)																			BEARING LOAD RATINGS		MAX RADIAL LOAD CAPACITY ON PLASTIC HOUSING PA (N)	WEIGHT (Kg)
		Closed	Open	A	B	C	D	E	F	F1	G	H	L	P	R	S	J	Z	T	m	n	U	V	DYNAMIC C (N)	STATIC Co (N)	

SHAFT LOCKING WITH GRUB SCREWS																											
20	52204T	50009	50009_APE	97.5	92	50	28.5	5.4	25	4.5	M6x0.75	62	17	19	32	76	45	34	35.2	18.2	7	44.5	54.5	9850	6580	7800	0.30
25	52205T	50009	50009_APE	97.5	92	50	34	5.4	25	4.5	M6x0.75	62	17	19	32	76	45	34	36.5	19.5	7.5	44.5	54.5	10800	7800	6500	0.35
30	52206T	50010	50010_APE	118	104	57	40	5.9	28	4.5	M6x0.75	72	18.5	22	37	89	56	37	40.5	22	8	51.5	61.5	15000	11300	12000	0.45
35	52207T	50010	50010_APE	118	104	57	46.7	7.4	28	4.5	M6x0.75	72	18.5	22	37	89	56	37	44	25.5	9.5	51.5	61.5	19700	15300	10000	0.55

SHAFT LOCKING WITH ECCENTRIC RING																											
20	52204TB	50009	50009_APE	97.5	92	50	33.3	5	25	4.5	M6x0.75	62	17	19	32	76	45	34	40.6	23.6	7.5	44.5	54.5	9850	6580	7800	0.38
25	52205TB	50009	50009_APE	97.5	92	50	38	5	25	4.5	M6x0.75	62	17	19	32	76	45	34	40.6	23.6	7.5	44.5	54.5	10800	7800	6500	0.40
30	52206TB	50010	50010_APE	118	104	57	44.5	6.2	28	4.5	M8x1.00	72	18.5	22	37	89	56	37	45.4	26.9	9	51.5	61.5	15000	11300	12000	0.50
35	52207TB	50010	50010_APE	118	104	57	55.6	7	28	4.5	M10x1.25	72	18.5	22	37	89	56	37	48.1	29.6	9.5	51.5	61.5	19700	15300	10000	0.60

Ø d mm	CODE VERSION		SAFETY CAP CODE		DIMENSIONS (mm)																			BEARING LOAD RATINGS		MAX RADIAL LOAD CAPACITY ON PLASTIC HOUSING		WEIGHT (Kg)
	PA	PP	Closed	Open	A	B	C	D	E	F	F1	G	H	L	P	R	S	J	Z	T	m	n	U	V	DYNAMIC C (N)	STATIC Co (N)	PA (N)	PP (N)

STAINLESS STEEL BEARING (with grub screws)																													
20	52204T/SS	62204T	50009	50009_APE	97.5	92	50	28.5	5.4	25	4.5	M6x0.75	62	17	19	32	76	45	34	35.2	18.2	7.6	44.5	54.5	7300	4900	7800	3200	0.30
25	52205T/SS	62205T	50009	50009_APE	97.5	92	50	34	5.4	25	4.5	M6x0.75	62	17	19	32	76	45	34	36.8	19.8	7.6	44.5	54.5	8100	5800	6500	3000	0.35
30	52206T/SS	62206T	50010	50010_APE	118	104	57	40	5.9	28	4.5	M6x0.75	72	18.5	22	37	89	56	37	40.7	22.2	9	51.5	61.5	11250	8400	12000	3500	0.45
35	52207T/SS	62207T	50010	50010_APE	118	104	57	46.7	7.4	28	4.5	M6x0.75	72	18.5	22	37	89	56	37	43.9	25.4	9.6	51.5	61.5	14700	11400	10000	3600	0.55

The dimension of the housings related to codes printed in bold letters are unified according to international standards.

COLOUR

- Bearing support in black.
- Safety cap in yellow.
- For sufficient quantities parts can be produced in different colours.