


Series UC-R

Flanged bearing support with stainless steel or painted plastic cover watertight for plain shafts d 30-35-40 mm

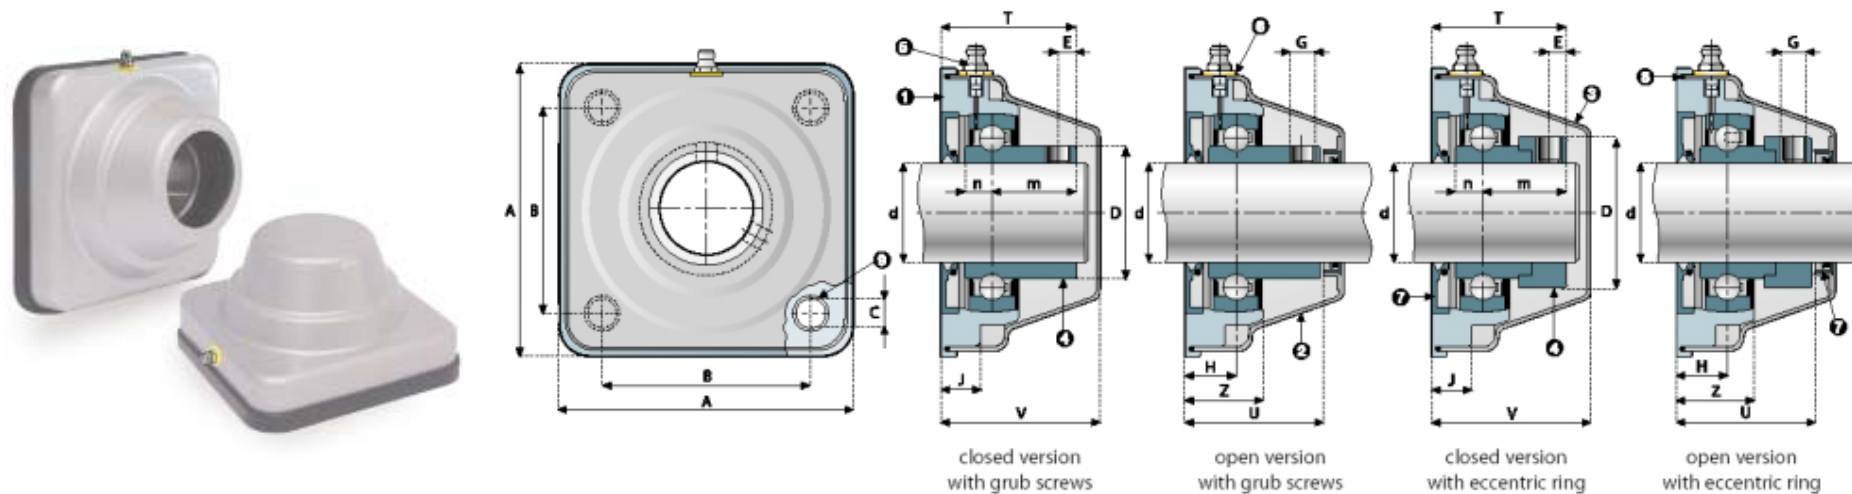

COMPONENTS

- 1 Internal housing in plastic material.
- 2 External housing in stainless steel (open version).
- 3 External housing in stainless steel (closed version).
- 4 Adjustable ball bearing, pre-lubricated by means of grease-nipple or quick coupler.
- 5 Ball-type grease-nipple.
- 6 Washer for grease-nipple.
- 7 Rotary shaft seal ring with extra dust-protection lip.
- 8 Heavy duty O-Ring.
- 9 Spacer to reinforce bolt holes.

Ø d mm	CODE VERSION		DIMENSIONS (mm)														BEARING LOAD RATINGS		MAX RADIAL LOAD CAPACITY ON PLASTIC HOUSING PA (N)	WEIGHT (Kg)
	CLOSED	OPEN	A	B	C	D	E	G	H	J	Z	T	m	n	U	V	DYNAMIC C (N)	STATIC Co (N)		

SHAFT LOCKING WITH GRUB SCREWS (stainless steel cover)																				
30	50206UCR	55206UCR	116	82.5	11	40	5.9	M6x0.75	19	15	30.5	41	22	8	56.8	65	15000	11300	13500	0.59
35	50207UCR	55207UCR	116	82.5	11	46.7	7.4	M6x0.75	19.5	15	30.5	45	25.5	9.5	56.8	65	19700	15300	13000	0.74
40	50208UCR	55208UCR	116	82.5	11	52.7	8	M8x1.00	20	15	30.5	52.1	32.1	9	56.8	65	22400	17900	12500	0.90

SHAFT LOCKING WITH ECCENTRIC RING (stainless steel cover)																				
30	50206UCBR	55206UCBR	116	82.5	11	44.5	6.2	M8x1.00	19	15	30.5	45.9	26.9	9	56.8	65	15000	11300	13500	0.66
35	50207UCBR	55207UCBR	116	82.5	11	55.6	7	M10x1.25	19.5	15	30.5	49.1	29.6	9.5	56.8	65	19700	15300	13000	0.95
40	50208UCBR	55208UCBR	116	82.5	11	60.3	7	M10x1.25	20	15	30.5	54.6	34.6	9	56.8	65	22400	17900	12500	1.10

STAINLESS STEEL BEARING (WITH GRUB SCREWS) (stainless steel cover)																				
30	50206UCRS	55206UCRS	116	82.5	11	40	5.9	M6x0.75	19	15	30.5	41.2	22.2	9	56.8	65	11250	8400	13500	0.59
35	50207UCRS	55207UCRS	116	82.5	11	46.7	7.4	M6x0.75	19.5	15	30.5	44.9	25.4	9.6	56.8	65	14700	11400	13000	0.74
40	50208UCRS	55208UCRS	116	82.5	11	52.7	8	M8x1.00	20	15	30.5	50.1	30.1	11	56.8	65	16800	13400	12500	0.90

SHAFT LOCKING WITH GRUB SCREWS (painted plastic cover)																				
30	50206UCRV	55206UCRV	116	82.5	11	40	5.9	M6x0.75	19	15	30.5	41	22	8	56.8	65	15000	11300	13500	0.59
35	50207UCRV	55207UCRV	116	82.5	11	46.7	7.4	M6x0.75	19.5	15	30.5	45	25.5	9.5	56.8	65	19700	15300	13000	0.74
40	50208UCRV	55208UCRV	116	82.5	11	52.7	8	M8x1.00	20	15	30.5	52.1	32.1	9	56.8	65	22400	17900	12500	0.90

SHAFT LOCKING WITH ECCENTRIC RING (painted plastic cover)																				
30	50206UCBRV	55206UCBRV	116	82.5	11	44.5	6.2	M8x1.00	19	15	30.5	45.9	26.9	9	56.8	65	15000	11300	13500	0.66
35	50207UCBRV	55207UCBRV	116	82.5	11	55.6	7	M10x1.25	19.5	15	30.5	49.1	29.6	9.5	56.8	65	19700	15300	13000	0.95
40	50208UCBRV	55208UCBRV	116	82.5	11	60.3	7	M10x1.25	20	15	30.5	54.6	34.6	9	56.8	65	22400	17900	12500	1.10

STAINLESS STEEL BEARING (WITH GRUB SCREWS) (painted plastic cover)																				
30	50206UCRSV	55206UCRSV	116	82.5	11	40	5.9	M6x0.75	19	15	30.5	41.2	22.2	9	56.8	65	11250	8400	13500	0.59
35	50207UCRSV	55207UCRSV	116	82.5	11	46.7	7.4	M6x0.75	19.5	15	30.5	44.9	25.4	9.6	56.8	65	14700	11400	13000	0.74

40	50208UCRSV	55208UCRSV	116	82.5	11	52.7	8	M8x1.00	20	15	30.5	50.1	30.1	11	56.8	65	16800	13400	12500	0.90
----	------------	------------	-----	------	----	------	---	---------	----	----	------	------	------	----	------	----	-------	-------	-------	------

The dimension of the housings related to codes printed in bold letters are unified according to international standards.

COLOUR

- Safety cap in grey (steel).
- Internal hosing in black.
- For sufficient quantities parts can be produced in different colours.